
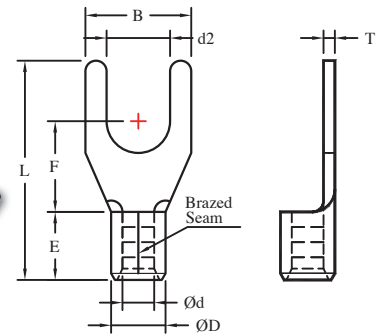


NON-INSULATED SPADE TERMINALS (BRAZED SEAM)

無絶縁叉型端子 (焊接)

TERMINAL MATERIAL: COPPER
PLATING: TIN

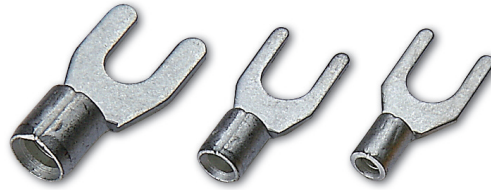


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	d2	B	F	L	E	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	Y1-3NB	#4	3.0	3.2	5.8	6.3	16.0	5.0	1.7	3.4	0.75
	Y1-3.5SNB	#6	3.5	3.7	5.8	6.3	16.0				
	Y1-3.5NB	#6	3.5	3.7	6.4	6.3	16.0				
	Y1-4SNB	#8	4.0	4.3	6.4	6.3	16.0				
	Y1-4NB	#8	4.0	4.3	7.2	6.3	16.0				
	Y1-4LNB	#8	4.0	4.3	8.1	7.0	16.7				
	Y1-5SNB	#10	5.0	5.3	8.1	7.0	16.7				
	Y1-5NB	#10	5.0	5.3	9.5	7.0	16.7				
	Y1-6SNB	1/4	6.0	6.4	9.5	7.0	16.7				
	Y1-6NB	1/4	6.0	6.4	12.0	11.0	22.4				
16-14 A.W.G. 1.5-2.5 mm ²	Y2-3NB	#4	3.0	3.2	5.8	6.5	16.2	5.0	2.3	4.1	0.8
	Y2-3.5SNB	#6	3.5	3.7	5.8	6.5	16.2				
	Y2-3.5NB	#6	3.5	3.7	6.4	6.5	16.2				
	Y2-4SNB	#8	4.0	4.3	6.4	6.5	16.2				
	Y2-4NB	#8	4.0	4.3	7.2	6.5	16.2				
	Y2-4LNB	#8	4.0	4.3	8.5	7.3	17.0				
	Y2-5SNB	#10	5.0	5.3	8.5	7.3	17.0				
	Y2-5NB	#10	5.0	5.3	9.5	7.0	16.7				
	Y2-6SNB	1/4	6.0	6.4	9.5	7.0	16.7				
	Y2-6NB	1/4	6.0	6.4	12.0	11.0	22.4				
14-12 A.W.G. 2.5-4 mm ²	Y3-3.5NB	#6	3.5	3.7	8.0	7.0	18.3	6.0	2.9	5.1	1.0
	Y3-4NB	#8	4.0	4.3	8.0	7.0	18.3				
	Y3-5NB	#10	5.0	5.3	8.0	7.0	18.3				
	Y3-6NB	1/4	6.0	6.4	12.0	9.1	21.5				
12-10 A.W.G. 4-6 mm ²	Y5-3.5SNB	#6	3.5	3.7	7.2	7.5	19.0	6.0	3.4	5.6	1.0
	Y5-3.5NB	#6	3.5	3.7	8.3	7.5	19.0				
	Y5-4SNB	#8	4.0	4.3	8.3	7.5	19.0				
	Y5-4NB	#8	4.0	4.3	9.5	7.5	18.7				
	Y5-5NB	#10	5.0	5.3	9.5	7.5	18.7				
	Y5-6NB	1/4	6.0	6.4	12.0	12.0	24.7				
8 A.W.G. 8 mm ²	Y8-5NB	#10	5.0	5.3	10.5	8.1	20.8	8.5	4.5	7.2	1.2
	Y8-6NB	1/4	6.0	6.4	10.8	8.6	22.5				
6 A.W.G. 14 mm ²	Y14-6NB	1/4	6.0	6.4	11.0	10.7	25.5	10.5	5.8	9.0	1.5
	Y14-8NB	5/16	8.0	8.4	13.8	10.7	28.5				

VINYL-INSULATED SPADE TERMINALS

PVC絶縁叉型端子

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: COPPER
 PLATING: TIN

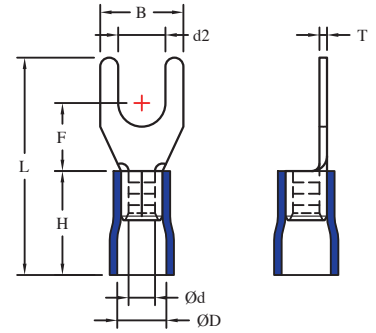

WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	d2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	VY1-3	#4	3.0	3.2	5.8	6.3	21.0	10.0	1.7	4.2	0.75
	VY1-3.5S	#6	3.5	3.7	5.8	6.3	21.0				
	VY1-3.5	#6	3.5	3.7	6.4	6.3	21.0				
	VY1-4S	#8	4.0	4.3	6.4	6.3	21.0				
	VY1-4	#8	4.0	4.3	7.2	6.3	21.0				
	VY1-4L	#8	4.0	4.3	8.1	7.0	21.7				
	VY1-5S	#10	5.0	5.3	8.1	7.0	21.7				
	VY1-5	#10	5.0	5.3	9.5	7.0	21.7				
	VY1-6S	1/4	6.0	6.4	9.5	7.0	21.7				
	VY1-6	1/4	6.0	6.4	12.0	11.0	27.4				
16-14 A.W.G. 1.5-2.5 mm ²	VY2-3	#4	3.0	3.2	5.8	6.5	21.2	10.0	2.3	4.6	0.8
	VY2-3.5S	#6	3.5	3.7	5.8	6.5	21.2				
	VY2-3.5	#6	3.5	3.7	6.4	6.5	21.2				
	VY2-4S	#8	4.0	4.3	6.4	6.5	21.2				
	VY2-4	#8	4.0	4.3	7.2	6.5	21.2				
	VY2-4L	#8	4.0	4.3	8.5	7.3	22.0				
	VY2-5S	#10	5.0	5.3	8.5	7.3	22.0				
	VY2-5	#10	5.0	5.3	9.5	7.0	21.7				
	VY2-6S	1/4	6.0	6.4	9.5	7.0	21.7				
	VY2-6	1/4	6.0	6.4	12.0	11.0	27.4				
14-12 A.W.G. 2.5-4 mm ²	VY3-3.5	#6	3.5	3.7	8.0	7.0	25.3	13.0	2.9	6.3	1.0
	VY3-4	#8	4.0	4.3	8.0	7.0	25.3				
	VY3-5	#10	5.0	5.3	8.0	7.0	25.3				
	VY3-6	1/4	6.0	6.4	12.0	9.1	28.5				
12-10 A.W.G. 4-6 mm ²	VY5-3.5S	#6	3.5	3.7	7.2	7.5	26.0	13.0	3.4	6.6	11.0
	VY5-3.5	#6	3.5	3.7	8.3	7.5	26.0				
	VY5-4S	#8	4.0	4.3	8.3	7.5	26.0				
	VY5-4	#8	4.0	4.3	9.5	7.5	25.7				
	VY5-5	#10	5.0	5.3	9.5	7.5	25.7				
	VY5-6	1/4	6.0	6.4	12.0	12.0	31.7				
	VY5-8	5/16	8.0	8.4	13.5	12.2	31.7				



VINYL-INSULATED SPADE TERMINALS (EASY-ENTRY)

PVC絕緣叉型端子 (易進式)

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: COPPER

PLATING: TIN

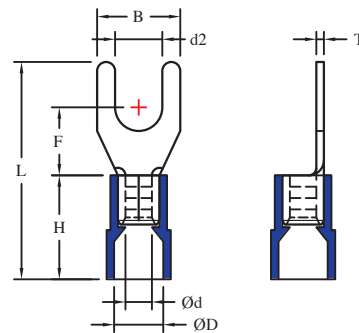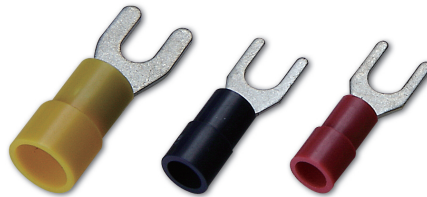


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	d2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	EVY1-3	#4	3.0	3.2	5.8	6.3	21.5	10.5	1.7	4.1	0.75
	EVY1-3.5S	#6	3.5	3.7	5.8	6.3	21.5				
	EVY1-3.5	#6	3.5	3.7	6.4	6.3	21.5				
	EVY1-4S	#8	4.0	4.3	6.4	6.3	21.5				
	EVY1-4	#8	4.0	4.3	7.2	6.3	21.5				
	EVY1-4L	#8	4.0	4.3	8.1	7.0	22.2				
	EVY1-5S	#10	5.0	5.3	8.1	7.0	22.2				
	EVY1-5	#10	5.0	5.3	9.5	7.0	22.2				
	EVY1-6S	1/4	6.0	6.4	9.5	7.0	22.2				
	EVY1-6	1/4	6.0	6.4	12.0	11.0	27.9				
16-14 A.W.G. 1.5-2.5 mm ²	EVY2-3	#4	3.0	3.2	5.8	6.5	22.2	11.0	2.3	4.5	0.8
	EVY2-3.5S	#6	3.5	3.7	5.8	6.5	22.2				
	EVY2-3.5	#6	3.5	3.7	6.4	6.5	22.2				
	EVY2-4S	#8	4.0	4.3	6.4	6.5	22.2				
	EVY2-4	#8	4.0	4.3	7.2	6.5	22.2				
	EVY2-4L	#8	4.0	4.3	8.5	7.3	23.0				
	EVY2-5S	#10	5.0	5.3	8.5	7.3	23.0				
	EVY2-5	#10	5.0	5.3	9.5	7.0	22.7				
	EVY2-6S	1/4	6.0	6.4	9.5	7.0	22.7				
	EVY2-6	1/4	6.0	6.4	12.0	11.0	28.4				
12-10 A.W.G. 4-6 mm ²	EVY5-3.5S	#6	3.5	3.7	7.2	7.5	26.0	13.0	3.4	6.5	1.0
	EVY5-3.5	#6	3.5	3.7	8.3	7.5	26.0				
	EVY5-4S	#8	4.0	4.3	8.3	7.5	26.0				
	EVY5-4	#8	4.0	4.3	9.5	7.5	25.7				
	EVY5-5	#10	5.0	5.3	9.5	7.5	25.7				
	EVY5-6	1/4	6.0	6.4	12.0	12.0	31.7				
	EVY5-8	5/16	8.0	8.4	13.5	12.2	31.7				

NYLON-INSULATED SPADE TERMINALS (EASY-ENTRY)

尼龍絕緣叉型端子 (易進式)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: COPPER
 PLATING: TIN

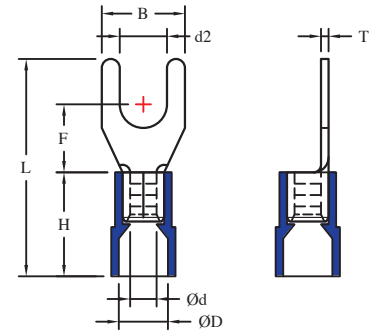

WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	d2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	ENY1-3	#4	3.0	3.2	5.8	6.3	22.0	11.0	1.7	4.1	0.75
	ENY1-3.5S	#6	3.5	3.7	5.8	6.3	22.0				
	ENY1-3.5	#6	3.5	3.7	6.4	6.3	22.0				
	ENY1-4S	#8	4.0	4.3	6.4	6.3	22.0				
	ENY1-4	#8	4.0	4.3	7.2	6.3	22.0				
	ENY1-4L	#8	4.0	4.3	8.1	7.0	22.7				
	ENY1-5S	#10	5.0	5.3	8.1	7.0	22.7				
	ENY1-5	#10	5.0	5.3	9.5	7.0	22.7				
	ENY1-6S	1/4	6.0	6.4	9.5	7.0	22.7				
	ENY1-6	1/4	6.0	6.4	12.0	11.0	28.4				
16-14 A.W.G. 1.5-2.5 mm ²	ENY2-3	#4	3.0	3.2	5.8	6.5	22.2	11.0	2.3	4.5	0.8
	ENY2-3.5S	#6	3.5	3.7	5.8	6.5	22.2				
	ENY2-3.5	#6	3.5	3.7	6.4	6.5	22.2				
	ENY2-4S	#8	4.0	4.3	6.4	6.5	22.2				
	ENY2-4	#8	4.0	4.3	7.2	6.5	22.2				
	ENY2-4L	#8	4.0	4.3	8.5	7.3	23.0				
	ENY2-5S	#10	5.0	5.3	8.5	7.3	23.0				
	ENY2-5	#10	5.0	5.3	9.5	7.0	22.7				
	ENY2-6S	1/4	6.0	6.4	9.5	7.0	22.7				
	ENY2-6	1/4	6.0	6.4	12.0	11.0	28.4				
12-10 A.W.G. 4-6 mm ²	ENY5-3.5S	#6	3.5	3.7	7.2	7.5	26.0	13.0	3.4	6.5	1.0
	ENY5-3.5	#6	3.5	3.7	8.3	7.5	26.0				
	ENY5-4S	#8	4.0	4.3	8.3	7.5	26.0				
	ENY5-4	#8	4.0	4.3	9.5	7.5	25.7				
	ENY5-5	#10	5.0	5.3	9.5	7.5	25.7				
	ENY5-6	1/4	6.0	6.4	12.0	12.0	31.7				
	ENY5-8	5/16	8.0	8.4	13.5	12.2	31.7				

VINYL-INSULATED SPADE TERMINALS (DOUBLE CRIMP)


PVC絕緣叉型端子 (易進式銅管)

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: COPPER

METALLIC SLEEVE: COPPER

PLATING: TIN


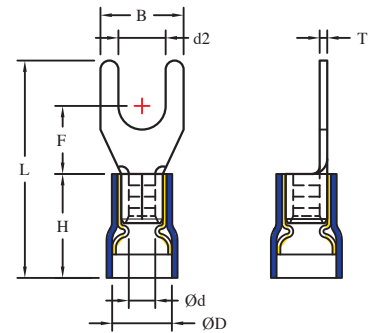


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	d2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	VY1-3C	#4	3.0	3.2	5.8	6.3	21.5	10.5	1.7	4.5	0.75
	VY1-3.5SC	#6	3.5	3.7	5.8	6.3	21.5				
	VY1-3.5C	#6	3.5	3.7	6.4	6.3	21.5				
	VY1-4SC	#8	4.0	4.3	6.4	6.3	21.5				
	VY1-4C	#8	4.0	4.3	7.2	6.3	21.5				
	VY1-4LC	#8	4.0	4.3	8.1	7.0	22.2				
	VY1-5SC	#10	5.0	5.3	8.1	7.0	22.2				
	VY1-5C	#10	5.0	5.3	9.5	7.0	22.2				
	VY1-6SC	1/4	6.0	6.4	9.5	7.0	22.2				
	VY1-6C	1/4	6.0	6.4	12.0	11.0	27.9				
16-14 A.W.G. 1.5-2.5 mm ²	VY2-3C	#4	3.0	3.2	5.8	6.5	21.7	10.5	2.3	5.0	0.8
	VY2-3.5SC	#6	3.5	3.7	5.8	6.5	21.7				
	VY2-3.5C	#6	3.5	3.7	6.4	6.5	21.7				
	VY2-4SC	#8	4.0	4.3	6.4	6.5	21.7				
	VY2-4C	#8	4.0	4.3	7.2	6.5	21.7				
	VY2-4LC	#8	4.0	4.3	8.5	7.3	22.5				
	VY2-5SC	#10	5.0	5.3	8.5	7.3	22.5				
	VY2-5C	#10	5.0	5.3	9.5	7.0	22.2				
	VY2-6SC	1/4	6.0	6.4	9.5	7.0	22.2				
	VY2-6C	1/4	6.0	6.4	12.0	11.0	27.9				
12-10 A.W.G. 4-6 mm ²	VY5-3.5SC	#6	3.5	3.7	7.2	7.5	26.0	13.0	3.4	6.7	1.0
	VY5-3.5C	#6	3.5	3.7	8.3	7.5	26.0				
	VY5-4SC	#8	4.0	4.3	8.3	7.5	26.0				
	VY5-4C	#8	4.0	4.3	9.5	7.5	25.7				
	VY5-5C	#10	5.0	5.3	9.5	7.5	25.7				
	VY5-6C	1/4	6.0	6.4	12.0	12.0	31.7				
	VY5-8C	5/16	8.0	8.4	13.5	12.2	31.7				

NYLON-INSULATED SPADE TERMINALS (DOUBLE CRIMP)

尼龍絕緣叉型端子 (易進式銅管)


INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: COPPER
 METALLIC SLEEVE: COPPER
 PLATING: TIN

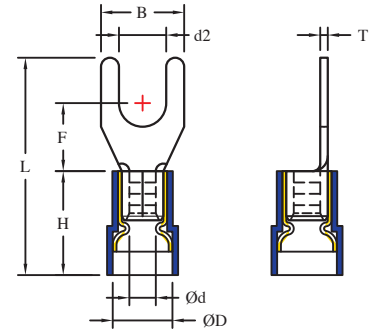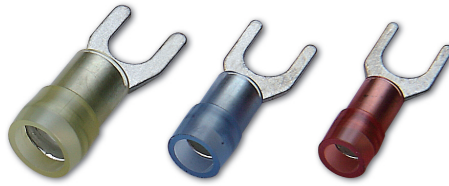

WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size	Dimensions (mm)								
		American	Metric	d2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	ENY1-3C	#4	3.0	3.2	5.8	6.3	22.0	11.0	1.7	4.5	0.75
	ENY1-3.5SC	#6	3.5	3.7	5.8	6.3	22.0				
	ENY1-3.5C	#6	3.5	3.7	6.4	6.3	22.0				
	ENY1-4SC	#8	4.0	4.3	6.4	6.3	22.0				
	ENY1-4C	#8	4.0	4.3	7.2	6.3	22.0				
	ENY1-4LC	#8	4.0	4.3	8.1	7.0	22.7				
	ENY1-5SC	#10	5.0	5.3	8.1	7.0	22.7				
	ENY1-5C	#10	5.0	5.3	9.5	7.0	22.7				
	ENY1-6SC	1/4	6.0	6.4	9.5	7.0	22.7				
	ENY1-6C	1/4	6.0	6.4	12.0	11.0	28.4				
16-14 A.W.G. 1.5-2.5 mm ²	ENY2-3C	#4	3.0	3.2	5.8	6.5	22.2	11.0	2.3	5.0	0.8
	ENY2-3.5SC	#6	3.5	3.7	5.8	6.5	22.2				
	ENY2-3.5C	#6	3.5	3.7	6.4	6.5	22.2				
	ENY2-4SC	#8	4.0	4.3	6.4	6.5	22.2				
	ENY2-4C	#8	4.0	4.3	7.2	6.5	22.2				
	ENY2-4LC	#8	4.0	4.3	8.5	7.3	23.0				
	ENY2-5SC	#10	5.0	5.3	8.5	7.3	23.0				
	ENY2-5C	#10	5.0	5.3	9.5	7.0	22.7				
	ENY2-6SC	1/4	6.0	6.4	9.5	7.0	22.7				
	ENY2-6C	1/4	6.0	6.4	12.0	11.0	28.4				
12-10 A.W.G. 4-6 mm ²	ENY5-3.5SC	#6	3.5	3.7	7.2	7.5	26.0	13.0	3.4	6.7	1.0
	ENY5-3.5C	#6	3.5	3.7	8.3	7.5	26.0				
	ENY5-4SC	#8	4.0	4.3	8.3	7.5	26.0				
	ENY5-4C	#8	4.0	4.3	9.5	7.5	25.7				
	ENY5-5C	#10	5.0	5.3	9.5	7.5	25.7				
	ENY5-6C	1/4	6.0	6.4	12.0	12.0	31.7				
	ENY5-8C	5/16	8.0	8.4	13.5	12.2	31.7				

INSULATED HEAT SHRINKABLE SPADE TERMINALS (BRAZED SEAM)
絕緣熱收縮叉型端子 (焊接)

INSULATION MATERIAL: HIGH DENSITY PE
TERMINAL MATERIAL: COPPER
PLATING: TIN

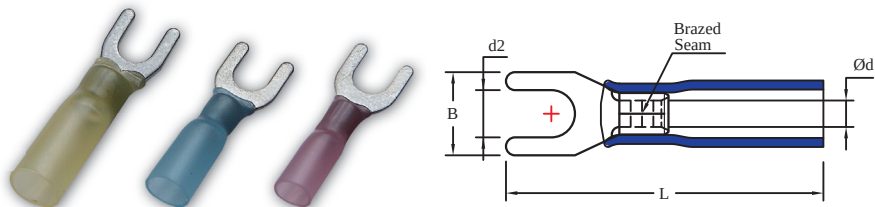

WIRE RANGE A.W.G. mm²	ITEM NO.	Stud Size		Dimensions (mm)			
		American	Metric	d2	B	L	Ød
22-16 A.W.G. 0.5-1.5 mm²	HY1-3.5NB-K	#6	3.5	3.7	6.4	28	1.7
	HY1-4NB-K	#8	4.0	4.3	7.2	28	
	HY1-5NB-K	#10	5.0	5.3	9.5	29	
16-14 A.W.G. 1.5-2.5 mm²	HY2-3.5NB-K	#6	3.5	3.7	6.4	28	2.3
	HY2-4NB-K	#8	4.0	4.3	7.2	28	
	HY2-5NB-K	#10	5.0	5.3	9.5	29	
12-10 A.W.G. 4-6 mm²	HY5-4NB-K	#8	4.0	4.3	9.5	33	3.4
	HY5-5NB-K	#10	5.0	5.3	9.5	33	
	HY5-6NB-K	1/4	6.0	6.4	12.0	39	