


NON-INSULATED PIN TERMINALS (BRAZED SEAM)

無絶縁針型端子 (焊接)

TERMINAL MATERIAL: COPPER
PLATING: TIN

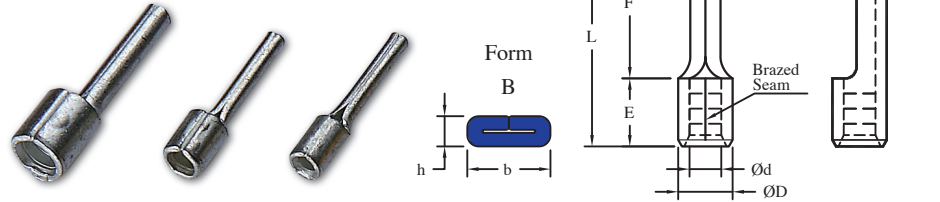


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)									
		Ød2	F	L	E	Ød	ØD	h	b	T	Form
22-16 A.W.G.	PT1-10NB	1.9	10.0	15.0	5.0	1.7	3.4			0.75	A
0.5-1.5 mm ²	PT1NB		12.0	17.0							
16-14 A.W.G.	PT2-10NB	1.9	10.0	15.0	5.0	2.3	4.1			0.8	A
1.5-2.5 mm ²	PT2NB		12.0	17.0							
12-10 A.W.G.	PT5NB	2.7	14.0	20.5	6.0	3.4	5.6			1.0	A
8 A.W.G.	PT10-12NB		14.0	22.0	8.0	4.6	7.0	2.4	4.3	1.1	B
10 mm ²											
6 A.W.G.	PT16-13NB		16.0	26.0	10.0	5.9	8.5	2.6	5.5	1.2	B
16 mm ²											
4 A.W.G.	PT25-15NB		20.0	33.5	13.5	7.1	9.7	2.6	6.8	1.2	B
25 mm ²											

VINYL-INSULATED PIN TERMINALS

PVC絕緣針型端子

INSULATION MATERIAL: VINYL(PVC)
TERMINAL MATERIAL: COPPER
PLATING: TIN

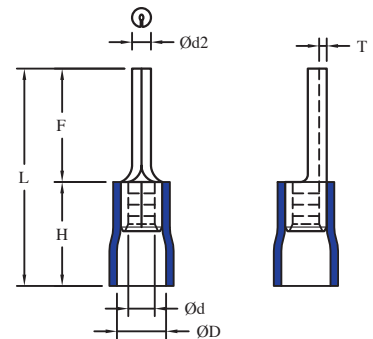


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		Ød2	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	VPT1-10	1.9	10.0	20.0	10.0	1.7	4.2	0.75
	VPT1		12.0	22.0				
16-14 A.W.G. 1.5-2.5 mm ²	VPT2-10	1.9	10.0	20.0	10.0	2.3	4.6	0.8
	VPT2		12.0	22.0				
12-10 A.W.G. 4-6 mm ²	VPT5	2.7	14.0	27.0	13.0	3.4	6.6	1.0

VINYL-INSULATED PIN TERMINALS (EASY-ENTRY)

PVC絕緣針型端子 (易進式)

INSULATION MATERIAL: VINYL(PVC)
TERMINAL MATERIAL: COPPER
PLATING: TIN




WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		Ød2	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	EVPT1-10	1.9	10.0	20.5	10.5	1.7	4.1	0.75
	EVPT1		12.0	22.5				
16-14 A.W.G. 1.5-2.5 mm ²	EVPT2-10	1.9	10.0	21.0	11.0	2.3	4.5	0.8
	EVPT2		12.0	23.0				
12-10 A.W.G. 4-6 mm ²	EVPT5	2.7	14.0	27.0	13.0	3.4	6.5	1.0

NYLON-INSULATED PIN TERMINALS (EASY-ENTRY)

尼龍絕緣針型端子 (易進式)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: COPPER
 PLATING: TIN




WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		Ød2	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	ENPT1-10	1.9	10.0	21.0	11.0	1.7	4.1	0.75
	ENPT1		12.0	23.0				
16-14 A.W.G. 1.5-2.5 mm ²	ENPT2-10	1.9	10.0	21.0	11.0	2.3	4.5	0.8
	ENPT2		12.0	23.0				
12-10 A.W.G. 4-6 mm ²	ENPT5	2.7	14.0	27.0	13.0	3.4	6.5	1.0

VINYL-INSULATED PIN TERMINALS (DOUBLE CRIMP)

PVC絕緣針型端子 (易進式銅管)

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: COPPER
 METALLIC SLEEVE: COPPER
 PLATING: TIN




WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		Ød2	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	VPT1-10C	1.9	10.0	20.5	10.5	1.7	4.5	0.75
	VPT1C		12.0	22.5				
16-14 A.W.G. 1.5-2.5 mm ²	VPT2-10C	1.9	10.0	20.5	10.5	2.3	5.0	0.8
	VPT2C		12.0	22.5				
12-10 A.W.G. 4-6 mm ²	VPT5C	2.7	14.0	27.0	13.0	3.4	6.7	1.0

NYLON-INSULATED PIN TERMINALS (DOUBLE CRIMP)

尼龍絕緣針型端子 (易進式銅管)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: COPPER
 METALLIC SLEEVE: COPPER
 PLATING: TIN



WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)							
		Ød2	F	L	H	Ød	ØD	T	
22-16 A.W.G. 0.5-1.5 mm ²	ENPT1-10C	1.9	10.0	21.0	11.0	1.7	4.5	0.75	
	ENPT1C		12.0	23.0					
16-14 A.W.G. 1.5-2.5 mm ²	ENPT2-10C	1.9	10.0	21.0	11.0	2.3	5.0	0.8	
	ENPT2C		12.0	23.0					
12-10 A.W.G. 4-6 mm ²	ENPT5C	2.7	14.0	27.0	13.0	3.4	6.7	1.0	