


NON-INSULATED BLADE TERMINALS (BRAZED SEAM)

無絶縁刀型端子 (焊接)

TERMINAL MATERIAL: COPPER
PLATING: TIN

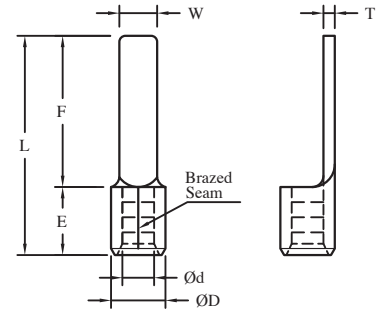


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		W	F	L	E	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	BL1-9NB	2.8	9.0	14.0	5.0	1.7	3.4	0.75
	BL1-10NB	2.3	10.2	15.2				
	BL1-11NB	3.0	11.1	16.1				
	BL1-14NB	3.0	14.5	19.5				
	BL1-18NB	2.3	18.0	23.0				
16-14 A.W.G. 1.5-2.5 mm ²	BL2-9NB	2.8	9.0	14.0	5.0	2.3	4.1	0.8
	BL2-10NB	2.2	10.0	15.0				
	BL2-13NB	2.2	13.0	18.0				
	BL2-18NB	2.2	18.2	23.2				
12-10 A.W.G. 4-6 mm ²	BL5-10NB	2.8	10.0	16.0	6.0	3.4	5.6	1.0
	BL5-18NB	4.5	18.2	24.2				

VINYL-INSULATED BLADE TERMINALS

PVC絶縁刀型端子

INSULATION MATERIAL: VINYL(PVC)
TERMINAL MATERIAL: COPPER
PLATING: TIN

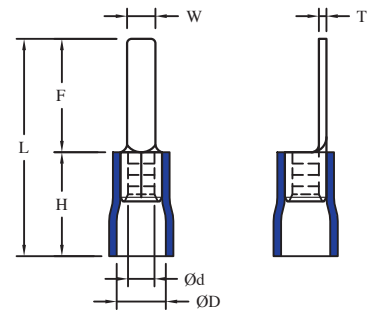

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		W	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	VBL1-9	2.8	9.0	19.0	10.0	1.7	4.2	0.75
	VBL1-10	2.3	10.2	20.2				
	VBL1-11	3.0	11.1	21.1				
	VBL1-14	3.0	14.5	24.5				
	VBL1-18	2.3	18.0	28.0				
16-14 A.W.G. 1.5-2.5 mm ²	VBL2-9	2.8	9.0	19.0	10.0	2.3	4.6	0.8
	VBL2-10	2.2	10.0	20.0				
	VBL2-13	2.2	13.0	23.0				
	VBL2-18	2.2	18.2	28.2				
12-10 A.W.G. 4-6 mm ²	VBL5-10	2.8	10.0	23.0	13.0	3.4	6.6	1.0
	VBL5-18	4.5	18.2	31.2				


VINYL-INSULATED BLADE TERMINALS (EASY-ENTRY)

PVC絕緣刀型端子 (易進式)

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: COPPER

PLATING: TIN

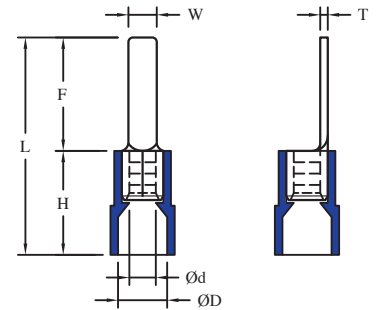

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		W	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	EVBL1-9	2.8	9.0	19.5	10.5	1.7	4.1	0.75
	EVBL1-10	2.3	10.2	20.7				
	EVBL1-11	3.0	11.1	21.6				
	EVBL1-14	3.0	14.5	25.0				
	EVBL1-18	2.3	18.0	28.5				
16-14 A.W.G. 1.5-2.5 mm ²	EVBL2-9	2.8	9.0	20.0	11.0	2.3	4.5	0.8
	EVBL2-10	2.2	10.0	21.0				
	EVBL2-13	2.2	13.0	24.0				
	EVBL2-18	2.2	18.2	29.2				
12-10 A.W.G. 4-6 mm ²	EVBL5-10	2.8	10.0	23.0	13.0	3.4	6.5	1.0
	EVBL5-18	4.5	18.2	31.2				


NYLON-INSULATED BLADE TERMINALS (EASY-ENTRY)

尼龍絕緣刀型端子 (易進式)

INSULATION MATERIAL: NYLON

TERMINAL MATERIAL: COPPER


PLATING: TIN

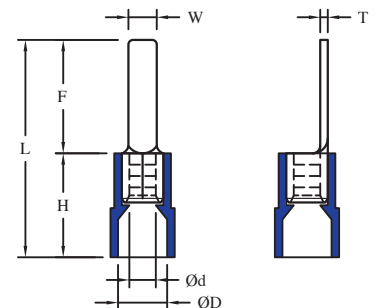

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		W	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	ENBL1-9	2.8	9.0	20.0	11.0	1.7	4.1	0.75
	ENBL1-10	2.3	10.2	21.2				
	ENBL1-11	3.0	11.1	22.1				
	ENBL1-14	3.0	14.5	25.5				
	ENBL1-18	2.3	18.0	29.0				
16-14 A.W.G. 1.5-2.5 mm ²	ENBL2-9	2.8	9.0	20.0	11.0	2.3	4.5	0.8
	ENBL2-10	2.2	10.0	21.0				
	ENBL2-13	2.2	13.0	24.0				
	ENBL2-18	2.2	18.2	29.2				
12-10 A.W.G. 4-6 mm ²	ENBL5-10	2.8	10.0	23.0	13.0	3.4	6.5	1.0
	ENBL5-18	4.5	18.2	31.2				

VINYL-INSULATED BLADE TERMINALS (DOUBLE CRIMP)**PVC絕緣刀型端子 (易進式銅管)**


INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: COPPER
 METALLIC SLEEVE: COPPER
 PLATING: TIN

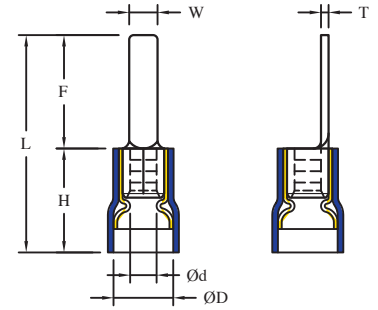

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		W	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	VBL1-9C	2.8	9.0	19.5	10.5	1.7	4.5	0.75
	VBL1-10C	2.3	10.2	20.7				
	VBL1-11C	3.0	11.1	21.6				
	VBL1-14C	3.0	14.5	24.9				
	VBL1-18C	2.3	18.0	28.5				
16-14 A.W.G. 1.5-2.5 mm ²	VBL2-9C	2.8	9.0	19.5	10.5	2.3	5.0	0.8
	VBL2-10C	2.2	10.0	20.5				
	VBL2-13C	2.2	13.0	23.5				
	VBL2-18C	2.2	18.2	28.7				
12-10 A.W.G. 4-6 mm ²	VBL5-10C	2.8	10.0	23.0	13.0	3.4	6.7	1.0
	VBL5-18C	4.5	18.2	31.2				

NYLON-INSULATED BLADE TERMINALS (DOUBLE CRIMP)**尼龍絕緣刀型端子 (易進式銅管)**

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: COPPER
 METALLIC SLEEVE: COPPER
 PLATING: TIN

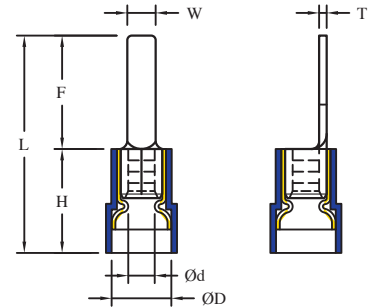

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		W	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	ENBL1-9C	2.8	9.0	20.0	11.0	1.7	4.5	0.75
	ENBL1-10C	2.3	10.2	21.2				
	ENBL1-11C	3.0	11.1	22.1				
	ENBL1-14C	3.0	14.5	25.4				
	ENBL1-18C	2.3	18.0	29.0				
16-14 A.W.G. 1.5-2.5 mm ²	ENBL2-9C	2.8	9.0	20.0	11.0	2.3	5.0	0.8
	ENBL2-10C	2.2	10.0	21.0				
	ENBL2-13C	2.2	13.0	24.0				
	ENBL2-18C	2.2	18.2	29.2				
12-10 A.W.G. 4-6 mm ²	ENBL5-10	2.8	10.0	23.0	13.0	3.4	6.7	1.0
	ENBL5-18	4.5	18.2	31.2				