


VINYL-INSULATED FEMALE DISCONNECTORS

PVC絕緣平插式母端連接器

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: BRASS
 PLATING: TIN



WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness
		W	F	L	H	Ød	ØD	T1
22-16 A.W.G. 0.5-1.5 mm ²	VD1-2.8F5	3.2	6.4	18.4	10.0	1.7	4.0	0.5
	VD1-2.8F8	3.2	6.4	18.4				0.8
	VD1-4.8F5	5.0	6.4	19.0				0.5
	VD1-4.8F8	5.0	6.4	19.0				0.8
	VD1-5.2F5	5.7	5.9	19.0				0.5
	VD1-5.2F8	5.7	5.9	19.0				0.8
	VD1-6.3F	6.6	7.8	21.0				0.8
	VD1-8F	8.2	10.0	23.0				0.8
16-14 A.W.G. 1.5-2.5 mm ²	VD2-2.8F5	3.2	6.4	18.4	10.0	2.3	4.5	0.5
	VD2-2.8F8	3.2	6.4	18.4				0.8
	VD2-4.8F5	5.0	6.4	19.0				0.5
	VD2-4.8F8	5.0	6.4	19.0				0.8
	VD2-5.2F5	5.7	5.9	19.0				0.5
	VD2-5.2F8	5.7	5.9	19.0				0.8
	VD2-6.3F	6.6	7.8	21.0				0.8
	VD2-8F	8.2	10.0	23.0				0.8
12-10 A.W.G. 4-6 mm ²	VD5-6.3F	6.6	7.8	24.0	13.0	3.4	5.5	0.8
	VD5-9.5F	10.0	12.0	29.0				1.2


VINYL-FULLY INSULATED FEMALE DISCONNECTORS

PVC全絕緣平插式母端連接器

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: BRASS

PLATING: TIN

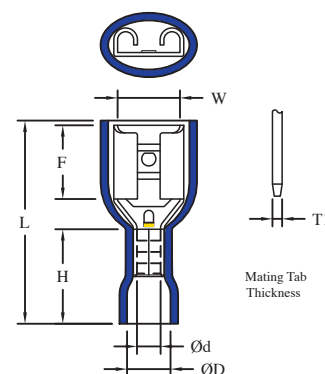


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness
		W	F	L	H	Ød	ØD	T1
22-16 A.W.G. 0.5-1.5 mm ²	LVD1-2.8F5	3.2	6.4	19.4	10.5	1.7	4.0	0.5
	LVD1-2.8F8	3.2	6.4	19.4				0.8
	LVD1-4.8F5	5.0	6.4	20.0				0.5
	LVD1-4.8F8	5.0	6.4	20.0				0.8
	LVD1-6.3F	6.6	7.8	22.0				0.8
16-14 A.W.G. 1.5-2.5 mm ²	LVD2-2.8F5	3.2	6.4	19.4	10.5	2.3	4.5	0.5
	LVD2-2.8F8	3.2	6.4	19.4				0.8
	LVD2-4.8F5	5.0	6.4	20.0				0.5
	LVD2-4.8F8	5.0	6.4	20.0				0.8
	LVD2-6.3F	6.6	7.8	22.0				0.8
12-10 A.W.G. 4-6 mm ²	LVD5-6.3F	6.6	7.8	24.5	13.0	3.4	5.5	0.8

NYLON-INSULATED FEMALE DISCONNECTORS (EASY-ENTRY))

尼龍絕緣平插式母端連接器 (易進式)


INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 PLATING: TIN



WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness
		W	F	L	H	Ød	ØD	T1
22-16 A.W.G. 0.5-1.5 mm ²	END1-2.8F5	3.2	6.4	19.4	11.0	1.7	4.1	0.5
	END1-2.8F8	3.2	6.4	19.4				0.8
	END1-4.8F5	5.0	6.4	20.0				0.5
	END1-4.8F8	5.0	6.4	20.0				0.8
	END1-5.2F5	5.7	5.9	20.0				0.5
	END1-5.2F8	5.7	5.9	20.0				0.8
	END1-6.3F	6.6	7.8	22.0				0.8
	END1-8F	8.2	10.0	24.0				0.8
16-14 A.W.G. 1.5-2.5 mm ²	END2-2.8F5	3.2	6.4	19.4	11.0	2.3	4.5	0.5
	END2-2.8F8	3.2	6.4	19.4				0.8
	END2-4.8F5	5.0	6.4	20.0				0.5
	END2-4.8F8	5.0	6.4	20.0				0.8
	END2-5.2F5	5.7	5.9	20.0				0.5
	END2-5.2F8	5.7	5.9	20.0				0.8
	END2-6.3F	6.6	7.8	22.0				0.8
	END2-8F	8.2	10.0	24.0				0.8
12-10 A.W.G. 4-6 mm ²	END5-6.3F	6.6	7.8	24.0	13.0	3.4	6.5	0.8
	END5-9.5F	10.0	12.0	29.0				1.2

VINYL-INSULATED FEMALE DISCONNECTORS (DOUBLE CRIMP)
PVC絕緣平插式母端連接器 (易進式銅管)

INSULATION MATERIAL: VINYL(PVC)
TERMINAL MATERIAL: BRASS
METALLIC SLEEVE: COPPER
PLATING: TIN



WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						Material Tab Thickness
		W	F	L	H	Ød	ØD	T1
22-16 A.W.G. 0.5-1.5 mm²	VD1-2.8F5C	3.2	6.4	18.9	10.5	1.7	4.1	0.5
	VD1-2.8F8C	3.2	6.4	18.9				0.8
	VD1-4.8F5C	5.0	6.4	19.5				0.5
	VD1-4.8F8C	5.0	6.4	19.5				0.8
	VD1-5.2F5C	5.7	5.9	19.5				0.5
	VD1-5.2F8C	5.7	5.9	19.5				0.8
	VD1-6.3FC	6.6	7.8	21.5				0.8
	VD1-8FC	8.2	10.0	23.5				0.8
16-14 A.W.G. 1.5-2.5 mm²	VD2-2.8F5C	3.2	6.4	18.9	10.5	2.3	4.9	0.5
	VD2-2.8F8C	3.2	6.4	18.9				0.8
	VD2-4.8F5C	5.0	6.4	19.5				0.5
	VD2-4.8F8C	5.0	6.4	19.5				0.8
	VD2-5.2F5C	5.7	5.9	19.5				0.5
	VD2-5.2F8C	5.7	5.9	19.5				0.8
	VD2-6.3FC	6.6	7.8	21.5				0.8
	VD2-8FC	8.2	10.0	23.5				0.8
12-10 A.W.G. 4-6 mm²	VD5-6.3FC	6.6	7.8	24.0	13.0	3.4	6.7	0.8
	VD5-9.5FC	10.0	12.0	29.0				1.2



VINYL-FULLY INSULATED FEMALE DISCONNECTORS (DOUBLE CRIMP)**PVC全絕緣平插式母端連接器 (易進式銅管)**

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: BRASS

METALLIC SLEEVE: COPPER

PLATING: TIN

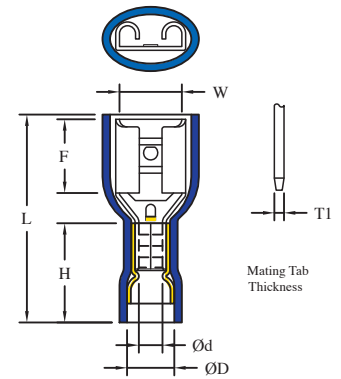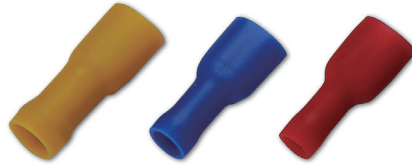


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness
		W	F	L	H	Ød	ØD	T1
22-16 A.W.G. 0.5-1.5 mm ²	LVD1-2.8F5C	3.2	6.4	19.4	10.5	1.7	4.1	0.5
	LVD1-2.8F8C	3.2	6.4	19.4				0.8
	LVD1-4.8F5C	5.0	6.4	20.0				0.5
	LVD1-4.8F8C	5.0	6.4	20.0				0.8
	LVD1-6.3FC	6.6	7.8	22.0				0.8
16-14 A.W.G. 1.5-2.5 mm ²	LVD2-2.8F5C	3.2	6.4	19.4	10.5	2.3	4.9	0.5
	LVD2-2.8F8C	3.2	6.4	19.4				0.8
	LVD2-4.8F5C	5.0	6.4	20.0				0.5
	LVD2-4.8F8C	5.0	6.4	20.0				0.8
	LVD2-6.3FC	6.6	7.8	22.0				0.8
12-10 A.W.G. 4-6 mm ²	LVD5-6.3FC	6.6	7.8	24.5	13.0	3.4	6.7	0.8

NYLON-INSULATED FEMALE DISCONNECTORS (DOUBLE CRIMP)

尼龍絕緣平插式母端連接器 (易進式銅管)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN




WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness
		W	F	L	H	Ød	ØD	T1
22-16 A.W.G. 0.5-1.5 mm ²	END1-2.8F5C	3.2	6.4	19.4	11.0	1.7	4.1	0.5
	END1-2.8F8C	3.2	6.4	19.4				0.8
	END1-4.8F5C	5.0	6.4	20.0				0.5
	END1-4.8F8C	5.0	6.4	20.0				0.8
	END1-5.2F5C	5.7	5.9	20.0				0.5
	END1-5.2F8C	5.7	5.9	20.0				0.8
	END1-6.3FC	6.6	7.8	22.0				0.8
	END1-8FC	8.2	10.0	24.0				0.8
16-14 A.W.G. 1.5-2.5 mm ²	END2-2.8F5C	3.2	6.4	19.4	11.0	2.3	4.9	0.5
	END2-2.8F8C	3.2	6.4	19.4				0.8
	END2-4.8F5C	5.0	6.4	20.0				0.5
	END2-4.8F8C	5.0	6.4	20.0				0.8
	END2-5.2F5C	5.7	5.9	20.0				0.5
	END2-5.2F8C	5.7	5.9	20.0				0.8
	END2-6.3FC	6.6	7.8	22.0				0.8
	END2-8FC	8.2	10.0	24.0				0.8
12-10 A.W.G. 4-6 mm ²	END5-6.3FC	6.6	7.8	24.0	13.0	3.4	6.7	0.8
	END5-9.5FC	10.0	12.0	29.0				1.2

INSULATED HEAT SHRINKABLE FEMALE DISCONNECTORS (DOUBLE CRIMP)

絕緣熱縮平插式母端連接器 (易進式銅管)

INSULATION MATERIAL: HIGH DENSITY PE
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN

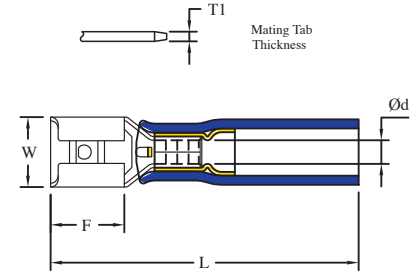

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)				Material Tab Thickness
		W	F	L	Ød	T1
22-16 A.W.G. 0.5-1.5 mm ²	HD1-6.3FC-K	6.6	7.8	28.0	1.7	0.8
16-14 A.W.G. 1.5-2.5 mm ²	HD2-6.3FC-K			28.0	2.3	
12-10 A.W.G. 4-6 mm ²	HD5-6.3FC-K			31.0	3.4	

NYLON-FULLY(SQUARE) INSULATED FEMALE DISCONNECTORS (EASY-ENTRY)

尼龍(四方型)全絕緣平插式母端連接器 (易進式)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 PLATING: TIN

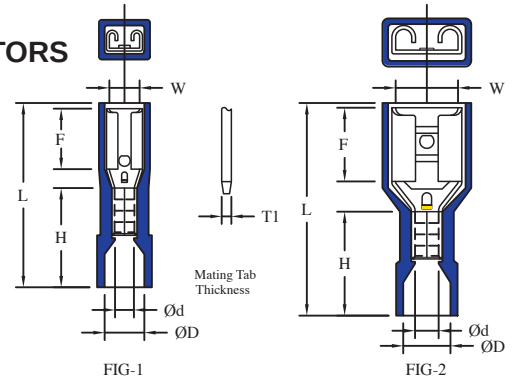



FIG-1


FIG-2

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness	FIG
		W	F	L	H	Ød	ØD	T1	
22-16 A.W.G. 0.5-1.5 mm ²	LNSD1-2.8F5	3.2	6.4	19.5	11.0	1.7	4.2	0.5	1
	LNSD1-2.8F8							0.8	1
	LNSD1-6.3F	6.6	7.8	22.0					2
16-14 A.W.G. 1.5-2.5 mm ²	LNSD2-6.3F	6.6	7.8	22.0	11.0	2.3	5.0	0.8	2

NYLON-FULLY INSULATED FEMALE DISCONNECTORS (EASY-ENTRY)

尼龍全絕緣平插式母端連接器 (易進式)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING: TIN




WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness	
		W	F	L	H	Ød	ØD	T1	
22-16 A.W.G. 0.5-1.5 mm ²	LND1-4.8F5	5.0	6.4	20.2	11.0	1.7	4.2	0.5	
	LND1-4.8F8							0.8	
16-14 A.W.G. 1.5-2.5 mm ²	LND2-4.8F5	5.0	6.4	20.2	11.0	2.3	5.0	0.5	
	LND2-4.8F8							0.8	

NYLON-FULLY INSULATED FEMALE DISCONNECTORS (EASY-ENTRY)

尼龍全絕緣平插式母端連接器 (易進式)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING: TIN

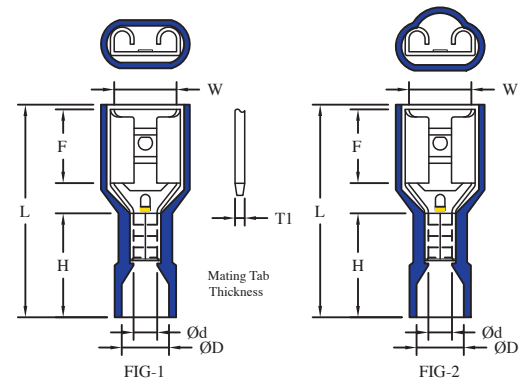


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness		FIG
		W	F	L	H	Ød	ØD	T1		
22-16 A.W.G. 0.5-1.5 mm ²	LND1-6.3F	6.6	7.8	22.5	11.0	1.7	4.2	0.8		1
16-14 A.W.G. 1.5-2.5 mm ²	LND2-6.3F	6.6	7.8	22.5	11.0	2.3	5.0			1
12-10 A.W.G. 4-6 mm ²	LND5-6.3F	6.6	7.8	24.5	13.0	3.4	6.6			2

NYLON-FULLY INSULATED MALE DISCONNECTORS (EASY-ENTRY)

尼龍全絕緣平插式公端連接器 (易進式)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 PLATING: TIN


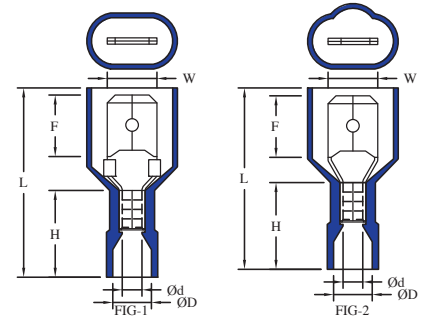


WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						FIG
		W	F	L	H	Ød	ØD	
22-16 A.W.G. 0.5-1.5 mm²	LNCD1-6.3M	6.3	7.8	24.0	11.0	1.7	4.2	1
16-14 A.W.G. 1.5-2.5 mm²	LNCD2-6.3M	6.3	7.8	24.0	11.0	2.3	5.0	1
12-10 A.W.G. 4-6 mm²	LND5-6.3M	6.3	7.8	25.0	13.0	3.4	6.6	2

NYLON-FULLY(SQUARE) INSULATED FEMALE DISCONNECTORS (DOUBLE CRIMP)

尼龍(四方型)全絕緣平插式母端連接器 (易進式銅管)


INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN

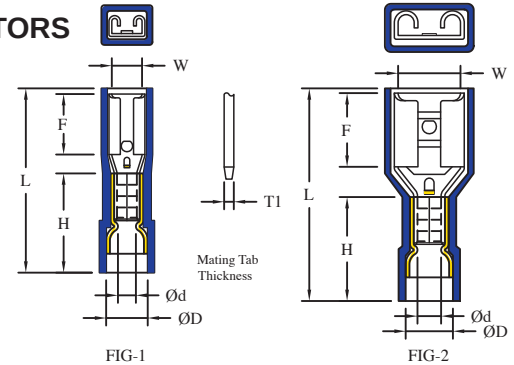

WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						Material Tab Thickness	FIG
		W	F	L	H	Ød	ØD	T1	
22-16 A.W.G. 0.5-1.5 mm²	LNSD1-2.8F5C	3.2	6.4	19.5	11.0	1.7	4.2	0.5	1
	LNSD1-2.8F8C							0.8	1
	LNSD1-6.3FC	6.6	7.8	22.0					2
16-14 A.W.G. 1.5-2.5 mm²	LNSD2-6.3FC	6.6	7.8	22.0	11.0	2.3	5.0	0.8	2

NYLON-FULLY INSULATED FEMALE DISCONNECTORS (DOUBLE CRIMP)
尼龍全絕緣平插式母端連接器 (易進式銅管)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
METALLIC SLEEVE: COPPER
PLATING: TIN




WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						Material Tab Thickness
		W	F	L	H	Ød	ØD	T1
22-16 A.W.G. 0.5-1.5 mm²	LND1-4.8F5C	5.0	6.4	20.2	11.0	1.7	4.2	0.5
	LND1-4.8F8C							0.8
16-14 A.W.G. 1.5-2.5 mm²	LND2-4.8F5C	5.0	6.4	20.2	11.0	2.3	5.0	0.5
	LND2-4.8F8C							0.8

NYLON-FULLY INSULATED FEMALE DISCONNECTORS (DOUBLE CRIMP)

尼龍全絕緣平插式母端連接器 (易進式銅管)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
METALLIC SLEEVE: COPPER
PLATING: TIN

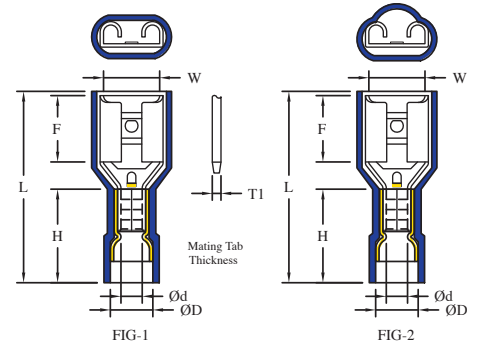


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						Material Tab Thickness	FIG
		W	F	L	H	Ød	ØD	T1	
22-16 A.W.G. 0.5-1.5 mm ²	LND1-6.3FC	6.6	7.8	22.5	11.0	1.7	4.2	0.8	1
16-14 A.W.G. 1.5-2.5 mm ²	LND2-6.3FC	6.6	7.8	22.5	11.0	2.3	5.0		1
12-10 A.W.G. 4-6 mm ²	LND5-6.3FC	6.6	7.8	24.5	13.0	3.4	6.6		2

NYLON-FULLY INSULATED MALE DISCONNECTORS (DOUBLE CRIMP)

尼龍全絕緣平插式公端連接器 (易進式銅管)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
METALLIC SLEEVE: COPPER
PLATING: TIN

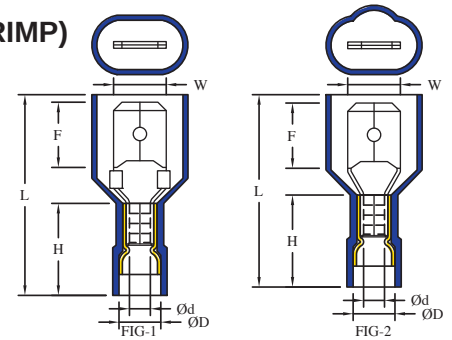

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						FIG
		W	F	L	H	Ød	ØD	
22-16 A.W.G. 0.5-1.5 mm ²	LNCD1-6.3MC	6.3	7.8	24.0	11.0	1.7	4.2	1
16-14 A.W.G. 1.5-2.5 mm ²	LNCD2-6.3MC	6.3	7.8	24.0	11.0	2.3	5.0	1
12-10 A.W.G. 4-6 mm ²	LND5-6.3MC	6.3	7.8	25.0	13.0	3.4	6.6	2

VINYL-INSULATED MALE DISCONNECTORS

PVC絕緣平插式公端連接器

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: BRASS
 PLATING: TIN




FIG-1




FIG-2

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						FIG
		W	F	L	H	Ød	ØD	
22-16 A.W.G. 0.5-1.5 mm ²	VD1-2.8M5	2.8	6.6	18.8	10.0	1.7	4.0	1
	VD1-2.8M8	2.8	6.6	18.8			4.2	
	VD1-4.8M5	4.8	6.6	18.8			4.0	
	VD1-4.8M8	4.8	6.6	18.8			4.2	
	VD1-6.3M	6.3	7.8	21.0			4.0	2
16-14 A.W.G. 1.5-2.5 mm ²	VD2-2.8M5	2.8	6.6	18.8	10.0	2.3	4.5	1
	VD2-2.8M8	2.8	6.6	18.8			4.6	
	VD2-4.8M5	4.8	6.6	18.8			4.5	
	VD2-4.8M8	4.8	6.6	18.8			4.6	
	VD2-6.3M	6.3	7.8	21.0			4.5	2
12-10 A.W.G. 4-6 mm ²	VD5-6.3M	6.3	7.8	24.0	13.0	3.4	5.5	2

NYLON-INSULATED MALE DISCONNECTORS (EASY-ENTRY)

尼龍絕緣平插式公端連接器 (易進式)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 PLATING: TIN




FIG-1




FIG-2

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						FIG
		W	F	L	H	Ød	ØD	
22-16 A.W.G. 0.5-1.5 mm ²	END1-2.8M5	2.8	6.6	19.8	11.0	1.7	4.1	1
	END1-2.8M8	2.8	6.6	19.8				
	END1-4.8M5	4.8	6.6	19.8				
	END1-4.8M8	4.8	6.6	19.8				
	END1-6.3M	6.3	7.8	22.0				2
16-14 A.W.G. 1.5-2.5 mm ²	END2-2.8M5	2.8	6.6	19.8	11.0	2.3	4.5	1
	END2-2.8M8	2.8	6.6	19.8				
	END2-4.8M5	4.8	6.6	19.8				
	END2-4.8M8	4.8	6.6	19.8				
	END2-6.3M	6.3	7.8	22.0				2
12-10 A.W.G. 4-6 mm ²	END5-6.3M	6.3	7.8	24.0	13.0	3.4	6.5	2

VINYL-INSULATED MALE DISCONNECTORS (DOUBLE CRIMP)
PVC絕緣平插式公端連接器 (易進式銅管)

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN




FIG-1





FIG-2

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						FIG
		W	F	L	H	Ød	ØD	
22-16 A.W.G. 0.5-1.5 mm ²	VD1-2.8M5C	2.8	6.6	19.3	10.5	1.7	4.1	1
	VD1-2.8M8C	2.8	6.6	19.3			4.5	
	VD1-4.8M5C	4.8	6.6	19.3			4.1	
	VD1-4.8M8C	4.8	6.6	19.3			4.5	
	VD1-6.3MC	6.3	7.8	21.5			4.1	2
16-14 A.W.G. 1.5-2.5 mm ²	VD2-2.8M5C	2.8	6.6	19.3	10.5	2.3	4.9	1
	VD2-2.8M8C	2.8	6.6	19.3			5.0	
	VD2-4.8M5C	4.8	6.6	19.3			4.9	
	VD2-4.8M8C	4.8	6.6	19.3			5.0	
	VD2-6.3MC	6.3	7.8	21.5			4.9	2
12-10 A.W.G. 4-6 mm ²	VD5-6.3MC	6.3	7.8	24.0	13.0	3.4	6.7	2

NYLON-INSULATED MALE DISCONNECTORS (DOUBLE CRIMP)

尼龍絕緣平插式公端連接器 (易進式銅管)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN

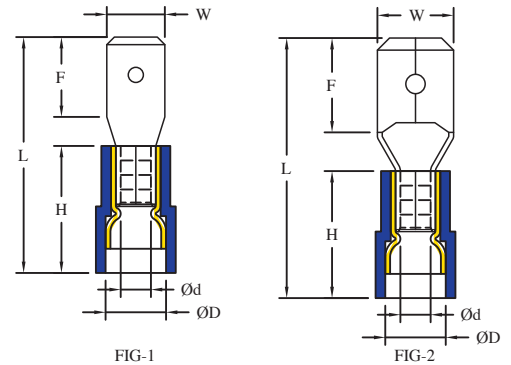


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						FIG
		W	F	L	H	Ød	ØD	
22-16 A.W.G. 0.5-1.5 mm ²	END1-2.8M5C	2.8	6.6	19.8	11.0	1.7	4.1	1
	END1-4.8M5C	4.8	6.6	19.8				1
	END1-6.3MC	6.3	7.8	22.0				2
16-14 A.W.G. 1.5-2.5 mm ²	END2-2.8M5C	2.8	6.6	19.8	11.0	2.3	4.9	1
	END2-4.8M5C	4.8	6.6	19.8				1
	END2-6.3MC	6.3	7.8	22.0				2
12-10 A.W.G. 4-6 mm ²	END5-6.3MC	6.3	7.8	24.0	13.0	3.4	6.7	2

INSULATED HEAT SHRINKABLE MALE DISCONNECTORS (DOUBLE CRIMP)

絕緣熱縮平插式公端連接器 (易進式銅管)



INSULATION MATERIAL: HIGH DENSITY PE
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN

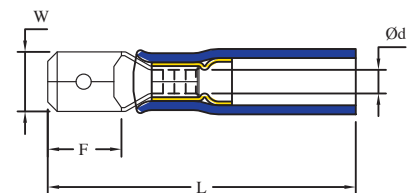

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)			
		W	F	L	Ød
22-16 A.W.G. 0.5-1.5 mm ²	HD1-6.3MC-K	6.3	7.8	28.0	1.7
16-14 A.W.G. 1.5-2.5 mm ²	HD2-6.3MC-K			28.0	2.3
12-10 A.W.G. 4-6 mm ²	HD5-6.3MC-K			31.0	3.4

VINYL-INSULATED PIGGY BACK DISCONNECTORS**PVC絕緣平插式公、母端連接器**



INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: BRASS
 PLATING: TIN

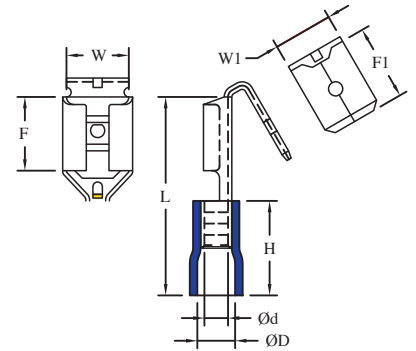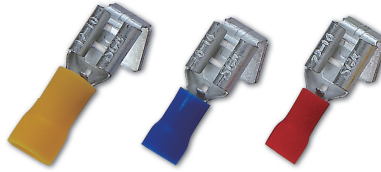

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)							
		W	F	L	H	Ød	ØD	W1	F1
22-16 A.W.G. 0.5-1.5 mm ²	VD1-6.3FM	6.6	7.8	21.0	10.0	1.7	4.0	6.3	8.0
16-14 A.W.G. 1.5-2.5 mm ²	VD2-6.3FM	6.6	7.8	21.0	10.0	2.3	4.5	6.3	8.0
12-10 A.W.G. 4-6 mm ²	VD5-6.3FM	6.6	7.8	24.0	13.0	3.4	5.5	6.3	8.0

NYLON-INSULATED PIGGY BACK DISCONNECTORS (EASY-ENTRY)**尼龍絕緣平插式公、母端連接器 (易進式)**

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 PLATING: TIN

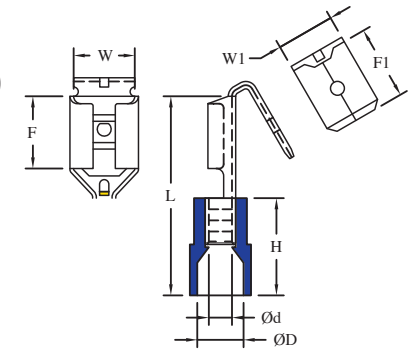
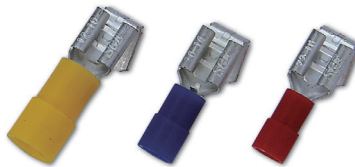


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)							
		W	F	L	H	Ød	ØD	W1	F1
22-16 A.W.G. 0.5-1.5 mm ²	END1-6.3FM	6.6	7.8	22.0	11.0	1.7	4.1	6.3	8.0
16-14 A.W.G. 1.5-2.5 mm ²	END2-6.3FM	6.6	7.8	22.0	11.0	2.3	4.5	6.3	8.0
12-10 A.W.G. 4-6 mm ²	END5-6.3FM	6.6	7.8	24.0	13.0	3.4	6.5	6.3	8.0

VINYL-INSULATED PIGGY BACK DISCONNECTORS(DOUBLE CRIMP)

PVC絕緣平插式公、母端連接器(易進式銅管)

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN

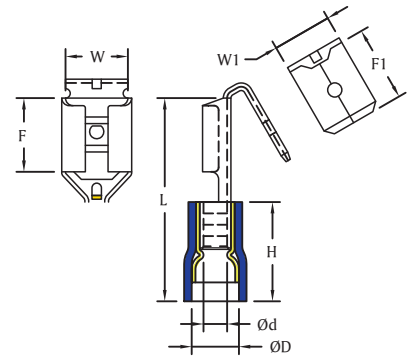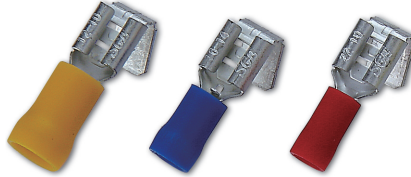


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)							
		W	F	L	H	Ød	ØD	W1	F1
22-16 A.W.G. 0.5-1.5 mm ²	VD1-6.3FMC	6.6	7.8	21.5	10.5	1.7	4.0	6.3	8.0
16-14 A.W.G. 1.5-2.5 mm ²	VD2-6.3FMC	6.6	7.8	21.5	10.5	2.3	4.9	6.3	8.0
12-10 A.W.G. 4-6 mm ²	VD5-6.3FMC	6.6	7.8	24.0	13.0	3.4	6.7	6.3	8.0

NYLON-INSULATED PIGGY BACK DISCONNECTORS(DOUBLE CRIMP)

尼龍絕緣平插式公、母端連接器(易進式銅管)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN


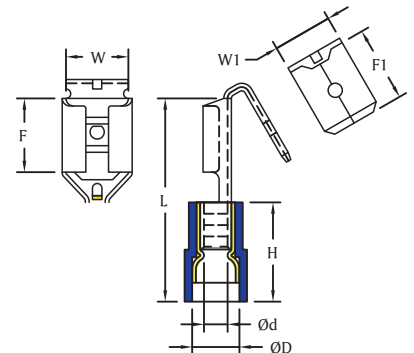


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)							
		W	F	L	H	Ød	ØD	W1	F1
22-16 A.W.G. 0.5-1.5 mm ²	END1-6.3FMC	6.6	7.8	22.0	11.0	1.7	4.1	6.3	8.0
16-14 A.W.G. 1.5-2.5 mm ²	END2-6.3FMC	6.6	7.8	22.0	11.0	2.3	4.9	6.3	8.0
12-10 A.W.G. 4-6 mm ²	END5-6.3FMC	6.6	7.8	24.0	13.0	3.4	6.7	6.3	8.0

VINYL-FULLY INSULATED RECEPTACLE DISCONNECTORS

PVC全絕緣子彈型母端連接器

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: BRASS
 PLATING: TIN

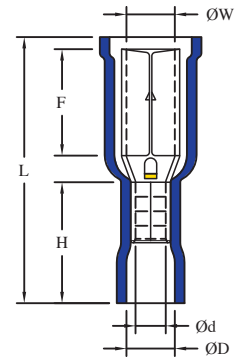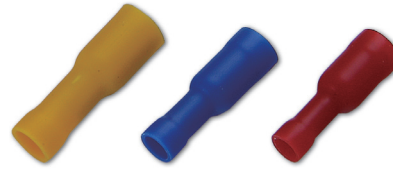


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	LVG1-4F	3.9	8.7	22.5	10.5	1.7	4.0
16-14 A.W.G. 1.5-2.5 mm ²	LVG2-4F	3.9	8.7	22.5	10.5	2.3	4.5
	LVG2-5F	4.9	8.8				
12-10 A.W.G. 4-6 mm ²	LVG5-5F	4.9	8.8	25.0	13.0	3.4	5.5

VINYL-FULLY INSULATED RECEPTACLE DISCONNECTORS (DOUBLE CRIMP)

PVC全絕緣子彈型母端連接器 (易進式銅管)

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN

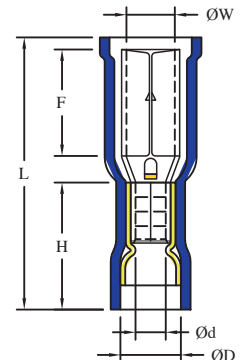

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	LVG1-4FC	3.9	8.7	22.5	10.5	1.7	4.1
16-14 A.W.G. 1.5-2.5 mm ²	LVG2-4FC	3.9	8.7	22.5	10.5	2.3	4.9
	LVG2-5FC	4.9	8.8				
12-10 A.W.G. 4-6 mm ²	LVG5-5FC	4.9	8.8	25.0	13.0	3.4	6.7


VINYL-INSULATED BULLET DISCONNECTORS

PVC絕緣子彈型公端連接器

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: BRASS

PLATING: TIN



WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	VG1-4M	4.0	8.7	21.0	10.0	1.7	4.0
16-14 A.W.G. 1.5-2.5 mm ²	VG2-4M	4.0	8.7	21.0	10.0	2.3	4.5
	VG2-5M	5.0	8.9				
12-10 A.W.G. 4-6 mm ²	VG5-5M	5.0	8.9	24.0	13.0	3.4	5.5


NYLON-INSULATED BULLET DISCONNECTORS (EASY-ENTRY)

尼龍絕緣子彈型公端連接器 (易進式)

INSULATION MATERIAL: NYLON

TERMINAL MATERIAL: BRASS

PLATING: TIN

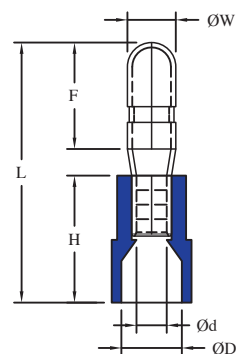

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	ENG1-4M	4.0	8.7	22.0	11.0	1.7	4.1
16-14 A.W.G. 1.5-2.5 mm ²	ENG2-4M	4.0	8.7	22.0	11.0	2.3	4.5
	ENG2-5M	5.0	8.9				
12-10 A.W.G. 4-6 mm ²	ENG5-5M	5.0	8.9	24.0	13.0	3.4	6.5


VINYL-INSULATED BULLET DISCONNECTORS (DOUBLE CRIMP)**PVC絕緣子彈型公端連接器 (易進式銅管)**

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: BRASS

METALLIC SLEEVE: COPPER

PLATING: TIN

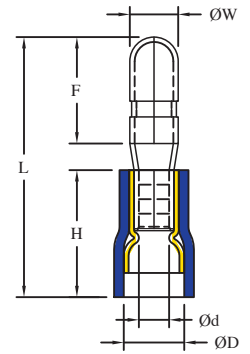

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	VG1-4MC	4.0	8.7	21.5	10.5	1.7	4.1
16-14 A.W.G. 1.5-2.5 mm ²	VG2-4MC	4.0	8.7	21.5	10.5	2.3	4.9
	VG2-5MC	5.0	8.9				
12-10 A.W.G. 4-6 mm ²	VG5-5MC	5.0	8.9	24.0	13.0	3.4	6.7


NYLON-INSULATED BULLET DISCONNECTORS (DOUBLE CRIMP)**尼龍絕緣子彈型公端連接器 (易進式銅管)**

INSULATION MATERIAL: NYLON

TERMINAL MATERIAL: BRASS

METALLIC SLEEVE: COPPER

PLATING: TIN

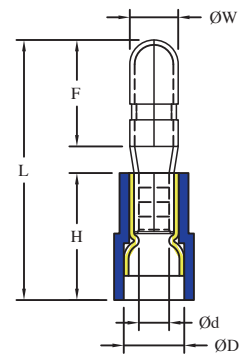


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	ENG1-4MC	4.0	8.7	22.0	11.0	1.7	4.1
16-14 A.W.G. 1.5-2.5 mm ²	ENG2-4MC	4.0	8.7	22.0	11.0	2.3	4.9
	ENG2-5MC	5.0	8.9				
12-10 A.W.G. 4-6 mm ²	ENG5-5MC	5.0	8.9	24.0	13.0	3.4	6.7

NYLON-FULLY INSULATED RECEPTACLE DISCONNECTORS (EASY-ENTRY)

尼龍全絕緣子彈型母端連接器 (易進式)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING: TIN




WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	LNG1-4F	4.0	8.7	25.2	11.0	1.7	4.0
16-14 A.W.G. 1.5-2.5 mm ²	LNG2-4F	4.0	8.7	25.2	11.0	2.3	5.0

NYLON-FULLY INSULATED BULLET DISCONNECTORS (EASY-ENTRY)

尼龍全絕緣子彈型公端連接器 (易進式)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING: TIN


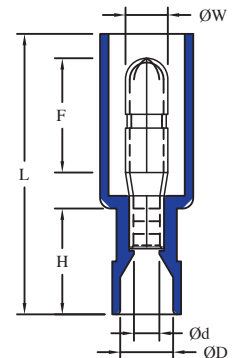


WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	LNG1-4M	3.9	10.7	26.5	10.0	1.7	4.0
16-14 A.W.G. 1.5-2.5 mm ²	LNG2-4M	3.9	10.7	26.5	10.0	2.3	5.0

NYLON-FULLY INSULATED RECEPTACLE DISCONNECTORS (DOUBLE CRIMP)

尼龍全絕緣子彈型母端連接器 (易進式銅管)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN





WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	LNG1-4FC	4.0	8.7	25.2	11.0	1.7	4.2
16-14 A.W.G. 1.5-2.5 mm ²	LNG2-4FC	4.0	8.7	25.2	11.0	2.3	5.0

NYLON-FULLY INSULATED BULLET DISCONNECTORS (DOUBLE CRIMP)

尼龍全絕緣子彈型公端連接器 (易進式銅管)


INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: BRASS
 METALLIC SLEEVE: COPPER
 PLATING: TIN

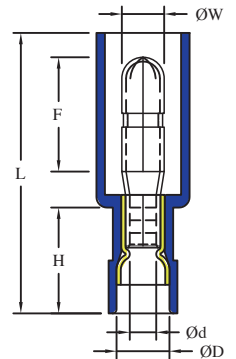

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					
		ØW	F	L	H	Ød	ØD
22-16 A.W.G. 0.5-1.5 mm ²	LNG1-4MC	3.9	10.7	26.5	10.0	1.7	4.2
16-14 A.W.G. 1.5-2.5 mm ²	LNG2-4MC	3.9	10.7	26.5	10.0	2.3	5.0

NYLON INSULATED FLAG FEMALE DISCONNECTORS (EASY-ENTRY)
尼龍全絕緣旗型母端連接器 (易進式)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING: TIN

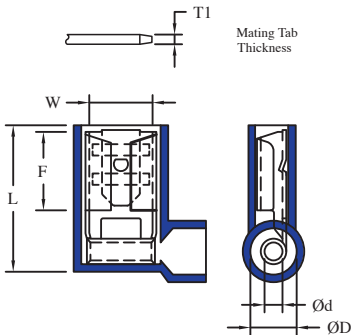

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)					Material Tab Thickness	
		W	F	L	Ød	ØD	T1	
22-16 A.W.G. 0.5-1.5 mm ²	NFL1-6.3F	6.6	7.8	16.0	1.7	4.4	0.8	
16-14 A.W.G. 1.5-2.5 mm ²	NFL2-6.3F	6.6	7.8	16.0	2.3	5.0	0.8	