

### TERMINAL SOFT SLEEVES

端子軟式套管

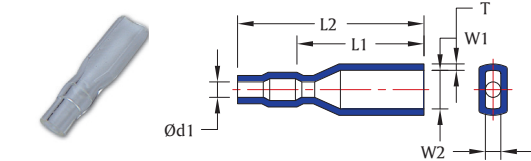
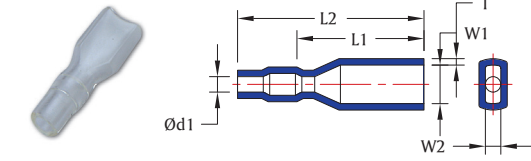
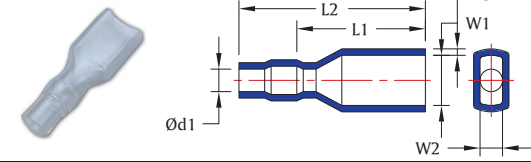
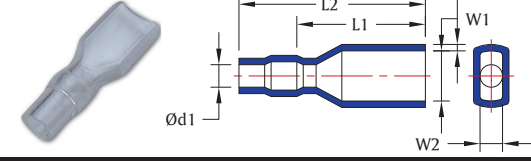
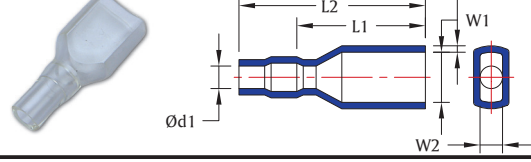
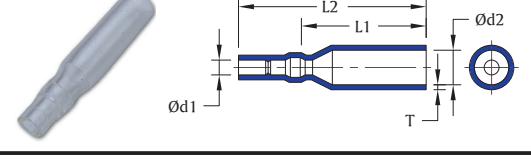
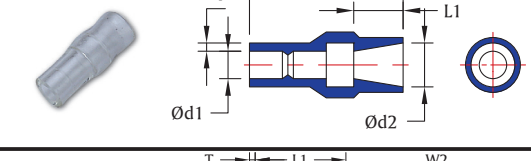
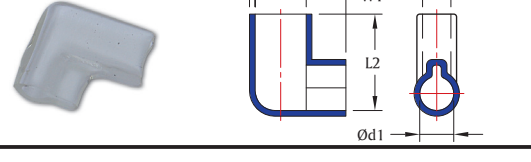
MATERIAL: VINYL(PVC)



| WIRE RANGE<br>mm <sup>2</sup> | ITEM NO. | Dimensions (mm) |      |      |
|-------------------------------|----------|-----------------|------|------|
|                               |          | Ød1             | Ød2  | L    |
| 1.25<br>mm <sup>2</sup>       | V1.25    | 3.3             | 3.1  | 15.0 |
| 2<br>mm <sup>2</sup>          | V2       | 4.5             | 3.7  | 16.0 |
| 3.5<br>mm <sup>2</sup>        | V3.5     | 5.7             | 4.1  | 18.0 |
| 5.5<br>mm <sup>2</sup>        | V5.5     | 5.7             | 5.2  | 20.0 |
| 8<br>mm <sup>2</sup>          | V8       | 7.2             | 6.2  | 21.0 |
| 14<br>mm <sup>2</sup>         | V14      | 10.0            | 8.0  | 28.0 |
| 22<br>mm <sup>2</sup>         | V22      | 12.0            | 9.5  | 29.0 |
| 38<br>mm <sup>2</sup>         | V38      | 14.0            | 11.8 | 34.0 |
| 60<br>mm <sup>2</sup>         | V60      | 17.0            | 13.9 | 42.0 |
| 80<br>mm <sup>2</sup>         | V80      | 19.0            | 16.0 | 46.0 |
| 100<br>mm <sup>2</sup>        | V100     | 22.0            | 18.0 | 55.0 |
| 125<br>mm <sup>2</sup>        | V125     | 24.0            | 20.0 | 60.0 |
| 150<br>mm <sup>2</sup>        | V150     | 26.0            | 22.0 | 65.0 |
| 200<br>mm <sup>2</sup>        | V200     | 32.2            | 24.0 | 69.0 |
| 250<br>mm <sup>2</sup>        | V250     | 36.5            | 27.2 | 75.0 |
| 325<br>mm <sup>2</sup>        | V325     | 36.7            | 30.0 | 75.0 |

**VINYL-INSULATED SLEEVES**  
**PVC絕緣套管**


MATERIAL: VINYL(PVC)

| ITEM NO.   | DRAWINGS                                                                            | Dimensions (mm) |      |     |     |     |     |     |
|------------|-------------------------------------------------------------------------------------|-----------------|------|-----|-----|-----|-----|-----|
|            |                                                                                     | L1              | L2   | W1  | W2  | Ød1 | Ød2 | T   |
| P-D1028F   |    | 14.6            | 22.0 | 4.0 | 2.1 | 2.5 |     | 1.0 |
| P-D2048F   |   | 14.0            | 22.0 | 5.8 | 2.6 | 3.0 |     | 1.0 |
| P-D2063F   |  | 17.0            | 27.0 | 7.8 | 3.5 | 3.5 |     | 1.0 |
| P-D2063M   |  | 16.0            | 26.0 | 9.5 | 5.0 | 3.5 |     | 1.0 |
| P-D5063F   |  | 17.0            | 27.0 | 8.0 | 3.6 | 4.1 |     | 1.0 |
| P-G2040F   |  | 23.0            | 33.0 |     |     | 3.2 | 5.0 | 1.0 |
| P-G2040M   |  | 4.5             | 15.0 |     |     | 3.0 | 4.1 | 1.0 |
| P-FL250F-R |  | 16.0            | 18.0 | 9.0 | 4.0 | 4.0 |     | 1.0 |

### NON-INSULATED CORD END SLEEVES (DIN 46228 / 1)

無絕緣歐式端子

TERMINAL MATERIAL: COPPER  
PLATING: TIN




| WIRE RANGE<br>mm <sup>2</sup> | ITEM NO. | Dimensions (mm) |     |      | PACKING PCS |
|-------------------------------|----------|-----------------|-----|------|-------------|
|                               |          | ØD1             | ØD2 | L    |             |
| 0.50<br>mm <sup>2</sup>       | LN005006 | 1.0             | 2.1 | 6.0  | 1,000       |
|                               | LN005008 |                 |     | 8.0  |             |
|                               | LN005010 |                 |     | 10.0 |             |
| 0.75<br>mm <sup>2</sup>       | LN007506 | 1.2             | 2.3 | 6.0  | 1,000       |
|                               | LN007508 |                 |     | 8.0  |             |
|                               | LN007510 |                 |     | 10.0 |             |
| 1.00<br>mm <sup>2</sup>       | LN010006 | 1.4             | 2.5 | 6.0  | 1,000       |
|                               | LN010008 |                 |     | 8.0  |             |
|                               | LN010010 |                 |     | 10.0 |             |
|                               | LN010012 |                 |     | 12.0 |             |
| 1.50<br>mm <sup>2</sup>       | LN015007 | 1.7             | 2.8 | 7.0  | 1,000       |
|                               | LN015008 |                 |     | 8.0  |             |
|                               | LN015010 |                 |     | 10.0 |             |
|                               | LN015012 |                 |     | 12.0 |             |
| 2.50<br>mm <sup>2</sup>       | LN025007 | 2.2             | 3.4 | 7.0  | 1,000       |
|                               | LN025008 |                 |     | 8.0  |             |
|                               | LN025010 |                 |     | 10.0 |             |
|                               | LN025012 |                 |     | 12.0 |             |
| 4.00<br>mm <sup>2</sup>       | LN040008 | 2.8             | 4.0 | 8.0  | 1,000       |
|                               | LN040009 |                 |     | 9.0  |             |
|                               | LN040010 |                 |     | 10.0 |             |
|                               | LN040012 |                 |     | 12.0 |             |
|                               | LN040015 |                 |     | 15.0 |             |
|                               | LN040018 |                 |     | 18.0 |             |
| 6.00<br>mm <sup>2</sup>       | LN060010 | 3.5             | 4.7 | 10.0 | 1,000       |
|                               | LN060012 |                 |     | 12.0 |             |
|                               | LN060015 |                 |     | 15.0 |             |
|                               | LN060018 |                 |     | 18.0 |             |
| 10.00<br>mm <sup>2</sup>      | LN100012 | 4.5             | 5.8 | 12.0 | 1,000       |
|                               | LN100015 |                 |     | 15.0 |             |
|                               | LN100018 |                 |     | 18.0 |             |
| 16.00<br>mm <sup>2</sup>      | LN160012 | 5.8             | 7.5 | 12.0 | 1,000       |
|                               | LN160015 |                 |     | 15.0 |             |
|                               | LN160018 |                 |     | 18.0 |             |

**NON-INSULATED CORD END SLEEVES (DIN 46228 / 1)**

無絕緣歐式端子

TERMINAL MATERIAL: COPPER  
PLATING: TIN

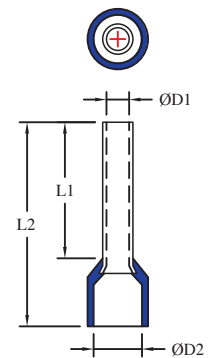


| WIRE RANGE<br>mm <sup>2</sup> | ITEM NO. | Dimensions (mm) |      |      | PACKING PCS |
|-------------------------------|----------|-----------------|------|------|-------------|
|                               |          | ØD1             | ØD2  | L    |             |
| 25.00<br>mm <sup>2</sup>      | LN250016 | 7.3             | 9.5  | 16.0 | 1,000       |
|                               | LN250018 |                 |      | 18.0 |             |
|                               | LN250022 |                 |      | 22.0 |             |
| 35.00<br>mm <sup>2</sup>      | LN350016 | 8.3             | 11.0 | 16.0 | 1,000       |
|                               | LN350018 |                 |      | 18.0 |             |
|                               | LN350020 |                 |      | 20.0 |             |
|                               | LN350025 |                 |      | 25.0 |             |
| 50.00<br>mm <sup>2</sup>      | LN500018 | 10.3            | 13.0 | 18.0 | 1,000       |
|                               | LN500020 |                 |      | 20.0 |             |
|                               | LN500025 |                 |      | 25.0 |             |
| 70.00<br>mm <sup>2</sup>      | LN700021 | 13.5            | 15.3 | 21.0 | 500         |
|                               | LN700025 |                 |      | 25.0 |             |
| 95.00<br>mm <sup>2</sup>      | LN950025 | 14.7            | 16.6 | 25.0 | 500         |
|                               | LN950032 |                 |      | 32.0 |             |
| 120.00<br>mm <sup>2</sup>     | LN120030 | 16.7            | 18.6 | 30.0 | 500         |
|                               | LN120032 |                 |      | 32.0 |             |
|                               | LN120034 |                 |      | 34.0 |             |
| 150.00<br>mm <sup>2</sup>     | LN150032 | 19.5            | 21.5 | 32.0 | 500         |
|                               | LN150038 |                 |      | 38.0 |             |

### INSULATED CORD END SLEEVES (DIN 46228 / 4)

絕緣歐式端子

INSULATION MATERIAL: NYLON  
TERMINAL MATERIAL: COPPER  
PLATING: TIN

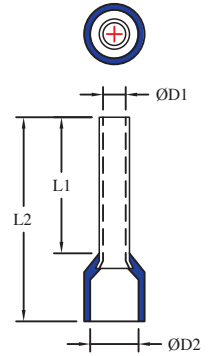


| WIRE RANGE<br>mm <sup>2</sup> | ITEM NO.<br>(T:French Color) |        | ITEM NO.<br>(W:German Color) |            | ITEM NO.<br>(DIN:DIN Color) |       | Dimensions (mm) |     |      |      | PACKING<br>PCS |
|-------------------------------|------------------------------|--------|------------------------------|------------|-----------------------------|-------|-----------------|-----|------|------|----------------|
|                               |                              |        |                              |            |                             |       | ØD1             | ØD2 | L1   | L2   |                |
| 0.25<br>mm <sup>2</sup>       | LT002506-VI                  | VIOLET | LT002506-LB                  | LIGHT BLUE |                             |       | 0.8             | 1.9 | 6.0  | 10.0 | 1,000          |
|                               | LT002508-VI                  |        | LT002508-LB                  |            |                             |       |                 |     | 8.0  | 12.0 |                |
| 0.34<br>mm <sup>2</sup>       | LT003406-PI                  | PINK   | LT003406-TU                  | TURQOISE   |                             |       | 0.8             | 1.9 | 6.0  | 10.0 | 1,000          |
|                               | LT003408-PI                  |        | LT003408-TU                  |            |                             |       |                 |     | 8.0  | 12.0 |                |
| 0.50<br>mm <sup>2</sup>       | LT005006-W                   | WHITE  | LT005006-OR                  | ORANGE     | LT005006-W                  | WHITE | 1.0             | 2.6 | 6.0  | 12.0 | 500            |
|                               | LT005008-W                   |        | LT005008-OR                  |            | LT005008-W                  |       |                 |     | 8.0  | 14.0 |                |
|                               | LT005010-W                   |        | LT005010-OR                  |            | LT005010-W                  |       |                 |     | 10.0 | 16.0 |                |
| 0.75<br>mm <sup>2</sup>       | LT007506-BL                  | BLUE   | LT007506-W                   | WHITE      | LT007506-GY                 | GREY  | 1.2             | 2.8 | 6.0  | 12.0 | 500            |
|                               | LT007508-BL                  |        | LT007508-W                   |            | LT007508-GY                 |       |                 |     | 8.0  | 14.0 |                |
|                               | LT007510-BL                  |        | LT007510-W                   |            | LT007510-GY                 |       |                 |     | 10.0 | 16.0 |                |
|                               | LT007512-BL                  |        | LT007512-W                   |            | LT007512-GY                 |       |                 |     | 12.0 | 18.0 |                |
| 1.0<br>mm <sup>2</sup>        | LT010006-R                   | RED    | LT010006-Y                   | YELLOW     | LT010006-R                  | RED   | 1.4             | 3.0 | 6.0  | 12.0 | 500            |
|                               | LT010008-R                   |        | LT010008-Y                   |            | LT010008-R                  |       |                 |     | 8.0  | 14.0 |                |
|                               | LT010010-R                   |        | LT010010-Y                   |            | LT010010-R                  |       |                 |     | 10.0 | 16.0 |                |
|                               | LT010012-R                   |        | LT010012-Y                   |            | LT010012-R                  |       |                 |     | 12.0 | 18.0 |                |
| 1.5<br>mm <sup>2</sup>        | LT015008-BK                  | BLACK  | LT015008-R                   | RED        | LT015008-BK                 | BLACK | 1.7             | 3.5 | 8.0  | 14.0 | 500            |
|                               | LT015010-BK                  |        | LT015010-R                   |            | LT015010-BK                 |       |                 |     | 10.0 | 16.0 |                |
|                               | LT015012-BK                  |        | LT015012-R                   |            | LT015012-BK                 |       |                 |     | 12.0 | 18.0 |                |
|                               | LT015018-BK                  |        | LT015018-R                   |            | LT015018-BK                 |       |                 |     | 18.0 | 24.0 |                |
| 2.5<br>mm <sup>2</sup>        | LT025008-GY                  | GREY   | LT025008-BL                  | BLUE       | LT025008-BL                 | BLUE  | 2.2             | 4.2 | 8.0  | 14.0 | 500            |
|                               | LT025010-GY                  |        | LT025010-BL                  |            | LT025010-BL                 |       |                 |     | 10.0 | 16.0 |                |
|                               | LT025012-GY                  |        | LT025012-BL                  |            | LT025012-BL                 |       |                 |     | 12.0 | 18.0 |                |
|                               | LT025018-GY                  |        | LT025018-BL                  |            | LT025018-BL                 |       |                 |     | 18.0 | 24.0 |                |

## INSULATED CORD END SLEEVES (DIN 46228 / 4)

絕緣歐式端子

INSULATION MATERIAL: NYLON  
 TERMINAL MATERIAL: COPPER  
 PLATING: TIN




| WIRE RANGE<br>mm <sup>2</sup> | ITEM NO.<br>(T:French Color) |        | ITEM NO.<br>(W:German Color) |       | ITEM NO.<br>(DIN:DIN Color) |        | Dimensions (mm) |      |      |      | PACKING<br>PCS |
|-------------------------------|------------------------------|--------|------------------------------|-------|-----------------------------|--------|-----------------|------|------|------|----------------|
|                               |                              |        |                              |       |                             |        | ØD1             | ØD2  | L1   | L2   |                |
| 4.0<br>mm <sup>2</sup>        | LT040010-OR                  | ORANGE | LT040010-GY                  | GREY  | LT040010-GY                 | GREY   | 2.8             | 4.8  | 10.0 | 17.0 | 500            |
|                               | LT040012-OR                  |        | LT040012-GY                  |       | LT040012-GY                 |        |                 |      | 12.0 | 20.0 |                |
|                               | LT040018-OR                  |        | LT040018-GY                  |       | LT040018-GY                 |        |                 |      | 18.0 | 26.0 |                |
| 6.0<br>mm <sup>2</sup>        | LT060012-GR                  | GREEN  | LT060012-BK                  | BLACK | LT060012-Y                  | YELLOW | 3.5             | 6.3  | 12.0 | 20.0 | 500            |
|                               | LT060018-GR                  |        | LT060018-BK                  |       | LT060018-Y                  |        |                 |      | 18.0 | 26.0 |                |
| 10.0<br>mm <sup>2</sup>       | LT100012-BR                  | BROWN  | LT100012-IV                  | IVORY | LT100012-R                  | RED    | 4.5             | 7.6  | 12.0 | 22.0 | 500            |
|                               | LT100018-BR                  |        | LT100018-IV                  |       | LT100018-R                  |        |                 |      | 18.0 | 28.0 |                |
| 16.0<br>mm <sup>2</sup>       | LT160012-IV                  | IVORY  | LT160012-GR                  | GREEN | LT160012-BL                 | BLUE   | 5.8             | 8.8  | 12.0 | 24.0 | 500            |
|                               | LT160018-IV                  |        | LT160018-GR                  |       | LT160018-BL                 |        |                 |      | 18.0 | 28.0 |                |
| 25.0<br>mm <sup>2</sup>       | LT250016-BK                  | BLACK  | LT250016-BR                  | BROWN | LT250016-Y                  | YELLOW | 7.3             | 11.2 | 16.0 | 30.0 | 500            |
|                               | LT250018-BK                  |        | LT250018-BR                  |       | LT250018-Y                  |        |                 |      | 18.0 | 30.0 |                |
|                               | LT250022-BK                  |        | LT250022-BR                  |       | LT250022-Y                  |        |                 |      | 22.0 | 36.0 |                |
| 35.0<br>mm <sup>2</sup>       | LT350016-R                   | RED    | LT350016-BE                  | BEIGE | LT350016-R                  | RED    | 8.3             | 12.7 | 16.0 | 30.0 | 500            |
|                               | LT350018-R                   |        | LT350018-BE                  |       | LT350018-R                  |        |                 |      | 18.0 | 32.0 |                |
|                               | LT350025-R                   |        | LT350025-BE                  |       | LT350025-R                  |        |                 |      | 25.0 | 39.0 |                |
| 50.0<br>mm <sup>2</sup>       | LT500020-BL                  | BLUE   | LT500020-OL                  | OLIVE | LT500020-BL                 | BLUE   | 10.2            | 15.0 | 20.0 | 36.0 | 500            |
|                               | LT500025-BL                  |        | LT500025-OL                  |       | LT500025-BL                 |        |                 |      | 25.0 | 40.0 |                |
| 70.0<br>mm <sup>2</sup>       |                              |        |                              |       | LT700021-Y                  | YELLOW | 13.5            | 16.0 | 21.0 | 37.0 | 100            |
| 95.0<br>mm <sup>2</sup>       |                              |        |                              |       | LT950025-R                  | RED    | 14.7            | 18.0 | 25.0 | 44.0 | 100            |
| 120.0<br>mm <sup>2</sup>      |                              |        |                              |       | LT120027-BL                 | BLUE   | 16.7            | 20.0 | 27.0 | 48.0 | 100            |
| 150.0<br>mm <sup>2</sup>      |                              |        |                              |       | LT150032-Y                  | YELLOW | 19.5            | 23.0 | 32.0 | 58.0 | 100            |

### INSULATED TWIN CORD END SLEEVES (DIN 46228 / 4)

絕緣雙線歐式端子

INSULATION MATERIAL: NYLON  
TERMINAL MATERIAL: COPPER  
PLATING: TIN



| WIRE RANGE<br>mm <sup>2</sup> | ITEM NO.<br>(T:French Color) |        | ITEM NO.<br>(W:German Color) |        | ITEM NO.<br>(DIN:DIN Color) |        | Dimensions (mm) |     |      |      |      | PACKING<br>PCS |
|-------------------------------|------------------------------|--------|------------------------------|--------|-----------------------------|--------|-----------------|-----|------|------|------|----------------|
|                               |                              |        |                              |        |                             |        | ØD              | W   | W1   | L1   | L2   |                |
| 2X0.50<br>mm <sup>2</sup>     | LT005008X2-W                 | WHITE  | LT005008X2-OR                | ORANGE | LT005008X2-W                | WHITE  | 1.5             | 2.7 | 4.7  | 8.0  | 15.0 | 500            |
| 2X0.75<br>mm <sup>2</sup>     | LT007508X2-BL                | BLUE   | LT007508X2-W                 | WHITE  | LT007508X2-GY               | GREY   | 1.8             | 2.8 | 5.0  | 8.0  | 15.0 | 500            |
|                               | LT007510X2-BL                |        | LT007510X2-W                 |        | LT007510X2-GY               |        |                 |     |      | 10.0 | 17.0 |                |
| 2X1.00<br>mm <sup>2</sup>     | LT010008X2-R                 | RED    | LT010008X2-Y                 | YELLOW | LT010008X2-R                | RED    | 2.05            | 3.4 | 5.4  | 8.0  | 15.0 | 500            |
|                               | LT010010X2-R                 |        | LT010010X2-Y                 |        | LT010010X2-R                |        |                 |     |      | 10.0 | 17.0 |                |
| 2X1.50<br>mm <sup>2</sup>     | LT015008X2-BK                | BLACK  | LT015008X2-R                 | RED    | LT015008X2-BK               | BLACK  | 2.3             | 3.6 | 6.6  | 8.0  | 16.0 | 500            |
|                               | LT015012X2-BK                |        | LT015012X2-R                 |        | LT015012X2-BK               |        |                 |     |      | 12.0 | 20.0 |                |
| 2X2.50<br>mm <sup>2</sup>     | LT025010X2-GY                | GREY   | LT025010X2-BL                | BLUE   | LT025010X2-BL               | BLUE   | 2.8             | 4.2 | 7.8  | 10.0 | 18.5 | 500            |
|                               | LT025013X2-GY                |        | LT025013X2-BL                |        | LT025013X2-BL               |        |                 |     |      | 13.0 | 21.5 |                |
| 2X4.00<br>mm <sup>2</sup>     | LT040012X2-OR                | ORANGE | LT040012X2-GY                | GREY   | LT040012X2-GY               | GREY   | 3.7             | 4.9 | 8.8  | 12.0 | 23.0 | 500            |
| 2X6.00<br>mm <sup>2</sup>     | LT060014X2-GR                | GREEN  | LT060014X2-BK                | BLACK  | LT060014X2-Y                | YELLOW | 4.8             | 6.9 | 10.0 | 14.0 | 26.0 | 500            |
| 2X10.00<br>mm <sup>2</sup>    | LT100014X2-BR                | BROWN  | LT100014X2-IV                | IVORY  | LT100014X2-R                | RED    | 6.4             | 7.6 | 12.8 | 14.0 | 26.5 | 500            |
| 2X16.00<br>mm <sup>2</sup>    | LT160014X2-IV                | IVORY  | LT160014X2-GR                | GREEN  | LT160014X2-BL               | BLUE   | 8.3             | 9.6 | 18.6 | 14.0 | 31.5 | 500            |