


COPPER TUBULAR LUGS TERMINALS (TL TAPYE)

圓型銅管高壓端子

TERMINAL MATERIAL: COPPER
PLATING: TIN




WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						
		Ød2	B	L	E	F	Ød	ØD
16-14 A.W.G. 1.5-2.5 mm²	CT2.5-4	4.3	8.0	18.0	7.0	7.0	2.4	3.9
	CT2.5-5	5.3	8.0	18.0				
	CT2.5-6	6.4	10.0	19.0				
14-12 A.W.G. 2.5-4 mm²	CT4-5	5.3	10.0	20.0	7.0	8.0	2.8	4.5
	CT4-6	6.4	10.0	20.0				
12-10 A.W.G. 4-6 mm²	CT6-5	5.3	10.0	23.0	9.0	9.0	3.8	5.5
	CT6-6	6.4	10.0	23.0				
	CT6-8	8.4	12.6	25.0				
8 A.W.G. 10 mm²	CT10-6	6.4	10.0	25.0	9.0	10.0	4.5	6.2
	CT10-8	8.4	12.6	26.0				
6 A.W.G. 16 mm²	CT16-5	5.3	10.0	30.0	12.0	11.0	5.4	7.1
	CT16-6	6.4	10.0	30.0				
	CT16-8	8.4	12.6	30.0				
4 A.W.G. 25 mm²	CT25-6	6.4	12.6	30.0	12.0	11.0	6.8	8.8
	CT25-8	8.4	12.6	30.0		12.5		
	CT25-10	10.5	15.0	32.0				
2 A.W.G. 35 mm²	CT35-6	6.4	15.0	35.0	13.0	14.0	8.2	10.6
	CT35-8	8.4	15.0	35.0				
	CT35-10	10.5	15.0	35.0				
	CT35-12	13.0	18.6	36.8	12.0			
1/0 A.W.G. 50 mm²	CT50-8	8.4	18.0	43.0	16.0	17.0	9.5	12.4
	CT50-10	10.5	18.0					
	CT50-12	13.0	19.0					
2/0 A.W.G. 70 mm²	CT70-8	8.4	21.0	50.0	18.0	20.0	11.2	14.7
	CT70-10	10.5	21.0					
	CT70-12	13.0	21.0					
3/0 A.W.G. 95 mm²	CT95-10	10.5	25.5	55.0	20.0	22.0	13.5	17.4
	CT95-12	13.0	25.5					
4/0 A.W.G. 120 mm²	CT120-10	10.5	28.0	60.0	22.0	24.0	15.0	19.4
	CT120-12	13.0	28.0					
	CT120-14	15.0	28.0					
	CT120-16	17.0	28.0					
250/300MCM A.W.G. 150 mm²	CT150-12	13.0	30.5	69.0	26.0	27.0	16.5	21.2
	CT150-14	15.0	30.5					
	CT150-16	17.0	30.5					

COPPER TUBULAR LUGS TERMINALS (TL TAPYE)

圓型銅管高壓端子

TERMINAL MATERIAL: COPPER

PLATING: TIN

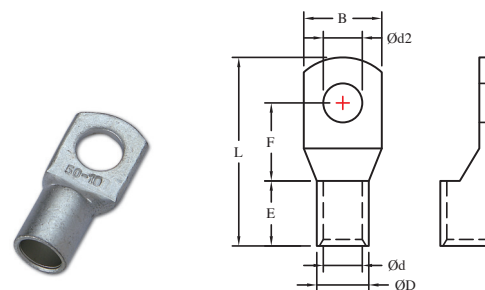

WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)						
		Ød2	B	L	E	F	Ød	ØD
300/350MCM A.W.G. 185 mm ²	CT185-12	13.0	34.0	78.0	32.0	29.0	18.5	23.5
	CT185-14	15.0	34.0					
	CT185-16	17.0	34.0					
400/450MCM A.W.G. 240 mm ²	CT240-14	15.0	38.5	92.0	38.0	34.0	21.0	26.5
	CT240-16	17.0	38.5					
	CT240-18	19.0	38.5					
500MCM A.W.G. 300 mm ²	CT300-14	15.0	43.5	101.0	42.0	37.0	23.5	30.0
	CT300-16	17.0	43.5					
	CT300-18	19.0	43.5					
600/750MCM A.W.G. 400 mm ²	CT400-16	17.0	53.0	114.0	44.0	44.0	28.5	36.5
	CT400-18	19.0	53.0					
	CT400-20	21.0	53.0					
800/1000MCM A.W.G. 500 mm ²	CT500-16	17.0	56.0	124.0	48.0	48.0	30.0	39.0
	CT500-18	19.0	56.0					
	CT500-20	21.0	56.0					
1000/1250 MCM A.W.G. 625 mm ²	CT625-16	17.0	63.5	130.0	52.0	51.0	34.5	44.0
	CT625-18	19.0	63.5					
	CT625-20	21.0	63.5					