


NON-INSULATED BUTT CONNECTORS

無絶縁中接连接器

TERMINAL MATERIAL: COPPER
PLATING: TIN



WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)		
		Ød	ØD	L
22-16 A.W.G. 0.5-1.5 mm ²	B1	1.8	3.3	15.0
16-14 A.W.G. 1.5-2.5 mm ²	B2	2.4	4.0	15.0
12-10 A.W.G. 4-6 mm ²	B5	3.6	5.5	15.0
8 A.W.G. 8 mm ²	B8	4.6	7.0	21.0
6 A.W.G. 14 mm ²	B14	5.9	8.9	26.0
4 A.W.G. 22 mm ²	B22	7.7	11.4	29.0
2 A.W.G. 38 mm ²	B38	9.4	13.3	32.0
1/0 A.W.G. 60 mm ²	B60	11.4	15.4	36.0
2/0 A.W.G. 70 mm ²	B70	13.3	17.5	37.0
3/0 A.W.G. 80 mm ²	B80	14.5	19.4	38.0
4/0 A.W.G. 100 mm ²	B100	16.4	22.0	38.0
250/300 MCM A.W.G. 150 mm ²	B150	19.5	26.5	54.0
300/350 MCM A.W.G. 180 mm ²	B180	21.0	28.5	57.0
400/500 MCM A.W.G. 200 mm ²	B200	24.0	32.5	63.0
500/600 MCM A.W.G. 325 mm ²	B325	28.0	37.0	72.0


VINYL-INSULATED BUTT SPLICE CONNECTORS (BRASS PLATE)

PVC絕緣接合式中接連接器 (黃銅板)

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: BRASS

PLATING: TIN



WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)		
		Ød	ØD	L
22-16 A.W.G. 0.5-1.5 mm²	VBS1	1.7	4.0	25.0
16-14 A.W.G. 1.5-2.5 mm²	VBS2	2.3	4.5	25.0
12-10 A.W.G. 4-6 mm²	VBS5	3.4	6.2	26.0




VINYL-INSULATED BUTT SPLICE CONNECTORS (COPPER PLATE)

PVC絕緣接合式中接連接器(紅銅板)

INSULATION MATERIAL: VINYL(PVC)

TERMINAL MATERIAL: COPPER

PLATING: TIN




WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)		
		Ød	ØD	L
22-16 A.W.G. 0.5-1.5 mm²	VBC1	1.7	4.2	25.0
16-14 A.W.G. 1.5-2.5 mm²	VBC2	2.3	4.9	25.0
12-10 A.W.G. 4-6 mm²	VBC5	3.4	6.6	26.0

VINYL-INSULATED BUTT SPLICE CONNECTORS (COPPER TUBULAR)

PVC絕緣接合式中接連接器 (紅銅管)

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: COPPER TUBULAR
 PLATING: TIN




WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)		
		Ød	ØD	L
22-16 A.W.G. 0.5-1.5 mm ²	VB1	1.7	4.2	25.0
16-14 A.W.G. 1.5-2.5 mm ²	VB2	2.3	4.9	25.0
12-10 A.W.G. 4-6 mm ²	VB5	3.4	6.6	26.0
8 A.W.G. 8 mm ²	VB8	4.6	8.5	35.5
6 A.W.G. 14 mm ²	VB14	5.9	10.5	47.0
4 A.W.G. 22 mm ²	VB22	7.7	13.0	51.0
2 A.W.G. 38 mm ²	VB38	9.4	15.0	54.0

NYLON-INSULATED BUTT SPLICE CONNECTORS (COPPER TUBULAR)

尼龍絕緣接合式中接連接器 (紅銅管)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: COPPER TUBULAR
PLATING: TIN




WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)		
		Ød	ØD	L
22-16 A.W.G. 0.5-1.5 mm²	NB1	1.7	4.1	26.0
16-14 A.W.G. 1.5-2.5 mm²	NB2	2.3	4.5	26.0
12-10 A.W.G. 4-6 mm²	NB5	3.4	6.5	27.0

HEAT SHRINKABLE-BUTT SPLICE CONNECTORS (WATERPROOF)

防水熱收縮中接管

INSULATION MATERIAL: HIGH DENSITY PE
TERMINAL MATERIAL: COPPER TUBULAR
PLATING: TIN

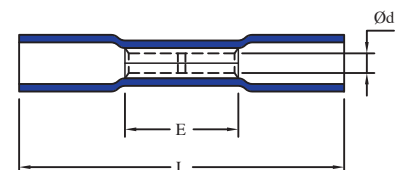


WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)		
		E	L	Ød
22-16 A.W.G. 0.5-1.5 mm²	HB1-K	15.0	37.0	1.7
16-14 A.W.G. 1.5-2.5 mm²	HB2-K	15.0	37.0	2.3
12-10 A.W.G. 4-6 mm²	HB5-K	15.0	41.0	3.4

NON-INSULATED PARALLEL CONNECTORS

無絶縁短式中接连接器

TERMINAL MATERIAL: COPPER
PLATING: TIN



WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)		
		Ød	ØD	L
22-16 A.W.G. 0.5-1.5 mm ²	P1	1.8	3.3	8.0
16-14 A.W.G. 1.5-2.5 mm ²	P2	2.4	4.0	8.0
12-10 A.W.G. 4-6 mm ²	P5	3.6	5.5	8.5
8 A.W.G. 8 mm ²	P8	4.6	7.0	9.5
6 A.W.G. 14 mm ²	P14	5.8	9.0	11.0
4 A.W.G. 22 mm ²	P22	7.7	11.4	13.5
2 A.W.G. 38 mm ²	P38	9.4	13.3	16.5
1/0 A.W.G. 60 mm ²	P60	11.4	15.4	18.5
2/0 A.W.G. 70 mm ²	P70	13.3	17.5	19.0
3/0 A.W.G. 80 mm ²	P80	14.5	19.4	19.5
4/0 A.W.G. 100 mm ²	P100	16.4	22.0	20.0
250/300 MCM A.W.G. 150 mm ²	P150	19.5	26.5	27.0
300/350 MCM A.W.G. 180 mm ²	P180	21.0	28.5	28.5
400/500 MCM A.W.G. 200 mm ²	P200	24.0	32.5	32.0
500/600 MCM A.W.G. 325 mm ²	P325	28.0	37.0	37.0

VINYL-INSULATED PARALLEL CONNECTORS (COPPER TUBULAR)
PVC絕緣平行式連接器 (紅銅管)



INSULATION MATERIAL: VINYL(PVC)
TERMINAL MATERIAL: COPPER TUBULAR
PLATING: TIN




WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)		
		Ød	ØD	L
22-16 A.W.G. 0.5-1.5 mm²	VP1	1.7	4.2	18.0
16-14 A.W.G. 1.5-2.5 mm²	VP2	2.4	4.9	18.0
12-10 A.W.G. 4-6 mm²	VP5	3.6	6.6	21.5

CLOSED END CONNECTORS

閉端子

TERMINAL MATERIAL: COPPER
PLATING: TIN




WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)				
		ød1	E	L	ød	øD
22-16 A.W.G. 1.25 mm ²	CE1	5.0	6.0	20.1	2.4	6.4
16-14 A.W.G. 2.0 mm ²	CE2	5.5	7.0	20.8	3.0	8.2
12-10 A.W.G. 5.5 mm ²	CE5	6.9	9.0	24.5	3.8	10.6
8 A.W.G. 8 mm ²	CE8	8.8	10.5	26.5	5.0	12.4

CLOSED END CONNECTORS (FLAT HEAD)


閉端子 (平頭式)

TERMINAL MATERIAL: COPPER
PLATING: TIN



WIRE RANGE A.W.G. mm ²	ITEM NO.	Dimensions (mm)				
		ød1	E	L	ød	øD
22-16 A.W.G. 1.25 mm ²	ECE1	5.0	6.0	15.2	2.4	6.2
16-14 A.W.G. 2.0 mm ²	ECE2	5.8	6.2	15.2	3.0	6.3
12-10 A.W.G. 5.5 mm ²	ECE5	7.4	8.7	18.2	4.0	9.4
8 A.W.G. 8 mm ²	ECE8	9.5	10.0	22.0	5.0	12.0

SCREW ON WIRE CONNECTORS
彈簧螺式接線頭



MATERIAL: VINYL(PVC)

WITH SPRING INSERT

SUITABLE WIRE A.W.G.	ITEM NO.	Dimensions (mm)			COLOR
		ØA	ØB	C	
22-14 A.W.G.	WNT1	6.5	8.6	15.2	GREY
22-14 A.W.G.	WNT2	7.1	9.9	17.6	BLUE
22-14 A.W.G.	WNT3	9.7	12.7	22.0	ORGANGE
22-10 A.W.G.	WNT4	11.0	14.0	24.6	YELLOW
22-10 A.W.G.	WNT6	13.0	16.3	26.5	RED