


NON-INSULATED RING TERMINALS (BRAZED SEAM)

無絕緣圓型端子 (焊接)

TERMINAL MATERIAL: COPPER
PLATING: TIN

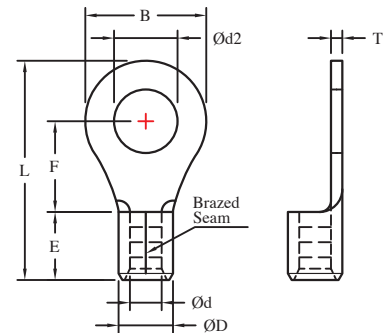


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	Ød2	B	F	L	E	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	R1-3NB	#4	3.0	3.2	5.5	4.8	12.5	5.0	1.7	3.4	0.75
	R1-3.5SNB	#6	3.5	3.7	5.5	4.8	12.5				
	R1-3.5NB	#6	3.5	3.7	6.6	6.3	14.6				
	R1-4SNB	#8	4.0	4.3	6.6	6.3	14.6				
	R1-4NB	#8	4.0	4.3	8.0	7.0	16.0				
	R1-5NB	#10	5.0	5.3	8.0	7.0	16.0				
	R1-6NB	1/4	6.0	6.4	11.6	11.1	21.9				
	R1-8NB	5/16	8.0	8.4	11.6	11.1	21.9				
	R1-10NB	3/8	10.0	10.5	13.6	13.9	25.7				
16-14 A.W.G. 1.5-2.5 mm ²	R2-3NB	#4	3.0	3.2	6.6	4.3	12.6	5.0	2.3	4.1	0.8
	R2-3.5SNB	#6	3.5	3.7	6.6	4.3	12.6				
	R2-3.5NB	#6	3.5	3.7	6.6	6.3	14.6				
	R2-4SNB	#8	4.0	4.3	6.6	6.3	14.6				
	R2-4NB	#8	4.0	4.3	8.5	7.8	17.0				
	R2-5SNB	#10	5.0	5.3	8.5	7.8	17.0				
	R2-5NB	#10	5.0	5.3	9.5	7.3	17.0				
	R2-6NB	1/4	6.0	6.4	12.0	11.0	22.0				
	R2-8NB	5/16	8.0	8.4	12.0	11.0	22.0				
	R2-10NB	3/8	10.0	10.5	13.6	13.9	25.7				
14-12 A.W.G. 2.5-4 mm ²	R3-4NB	#8	4.0	4.3	8.0	7.8	17.8	6.0	2.9	5.1	1.0
	R3-5NB	#10	5.0	5.3	8.0	7.8	17.8				
	R3-5LNB	#10	5.0	5.3	12.0	9.4	21.4				
	R3-6NB	1/4	6.0	6.4	12.0	9.4	21.4				
	R3-8NB	5/16	8.0	8.4	15.0	13.3	26.8				
	R3-10NB	3/8	10.0	10.5	15.0	13.3	26.8				
	R3-12NB	1/2	12.0	13.0	19.2	16.0	31.6				
12-10 A.W.G. 4-6 mm ²	R5-3.5NB	#6	3.5	3.7	7.2	5.9	15.5	6.0	3.4	5.6	1.0
	R5-4SNB	#8	4.0	4.3	7.2	5.9	15.5				
	R5-4NB	#8	4.0	4.3	9.5	8.3	19.0				
	R5-5NB	#10	5.0	5.3	9.5	8.3	19.0				
	R5-6NB	1/4	6.0	6.4	12.0	10.5	22.5				
	R5-8NB	5/16	8.0	8.4	15.0	13.7	27.2				
	R5-10NB	3/8	10.0	10.5	15.0	13.7	27.2				
	R5-12NB	1/2	12.0	13.0	19.2	16.0	31.6				

NON-INSULATED RING TERMINALS (BRAZED SEAM)

無絕緣圓型端子 (焊接)

TERMINAL MATERIAL: COPPER
PLATING: TIN

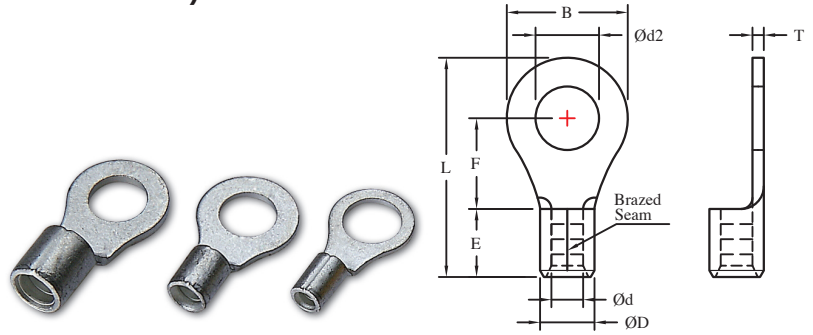


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	Ød2	B	F	L	E	Ød	ØD	T
8 A.W.G. 8 mm ²	R8-4NB	#8	4.0	4.3	12.0	9.3	23.8	8.5	4.5	7.1	1.2
	R8-5NB	#10	5.0	5.3	12.0	9.3	23.8				
	R8-5LNB	#10	5.0	5.3	15.0	13.8	29.8				
	R8-6NB	1/4	6.0	6.4	12.0	9.3	23.8				
	R8-6LNB	1/4	6.0	6.4	15.0	13.8	29.8				
	R8-8NB	5/16	8.0	8.4	15.0	13.8	29.8				
	R8-10NB	3/8	10.0	10.5	15.0	13.8	29.8				
	R8-12NB	1/2	12.0	13.0	20.0	15.0	33.5				
6 A.W.G. 14 mm ²	R14-4NB	#8	4.0	4.3	12.0	13.3	29.8	10.5	5.8	9.0	1.5
	R14-5NB	#10	5.0	5.3	12.0	13.3	29.8				
	R14-6NB	1/4	6.0	6.4	12.0	13.3	29.8				
	R14-6LNB	1/4	6.0	6.4	16.0	14.5	33.0				
	R14-8NB	5/16	8.0	8.4	16.0	14.5	33.0				
	R14-10NB	3/8	10.0	10.5	16.0	14.5	33.0				
	R14-12NB	1/2	12.0	13.0	22.0	19.5	41.0				

VINYL-INSULATED RING TERMINALS

PVC絕緣圓型端子

INSULATION MATERIAL: VINYL(PVC)
TERMINAL MATERIAL: COPPER
PLATING: TIN

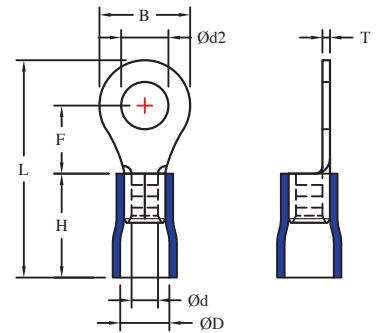


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	Ød2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	VR1-3	#4	3.0	3.2	5.5	4.8	17.5	10.0	1.7	4.2	0.75
	VR1-3.5S	#6	3.5	3.7	5.5	4.8	17.5				
	VR1-3.5	#6	3.5	3.7	6.6	6.3	19.6				
	VR1-4S	#8	4.0	4.3	6.6	6.3	19.6				
	VR1-4	#8	4.0	4.3	8.0	7.0	21.0				
	VR1-5	#10	5.0	5.3	8.0	7.0	21.0				
	VR1-6	1/4	6.0	6.4	11.6	11.1	26.9				
	VR1-8	5/16	8.0	8.4	11.6	11.1	26.9				
	VR1-10	3/8	10.0	10.5	13.6	13.9	30.7				
16-14 A.W.G. 1.5-2.5 mm ²	VR2-3	#4	3.0	3.2	6.6	4.3	17.6	10.0	2.3	4.6	0.8
	VR2-3.5S	#6	3.5	3.7	6.6	4.3	17.6				
	VR2-3.5	#6	3.5	3.7	6.6	6.3	19.6				
	VR2-4S	#8	4.0	4.3	6.6	6.3	19.6				
	VR2-4	#8	4.0	4.3	8.5	7.8	22.0				
	VR2-5S	#10	5.0	5.3	8.5	7.8	22.0				
	VR2-5	#10	5.0	5.3	9.5	7.3	22.0				
	VR2-6	1/4	6.0	6.4	12.0	11.0	27.0				
	VR2-8	5/16	8.0	8.4	12.0	11.0	27.0				
	VR2-10	3/8	10.0	10.5	13.6	13.9	30.7				
14-12 A.W.G. 2.5-4 mm ²	VR3-4	#8	4.0	4.3	8.0	7.8	24.8	13.0	2.9	6.3	1.0
	VR3-5	#10	5.0	5.3	8.0	7.8	24.8				
	VR3-5L	#10	5.0	5.3	12.0	9.4	28.4				
	VR3-6	1/4	6.0	6.4	12.0	9.4	28.4				
	VR3-8	5/16	8.0	8.4	15.0	13.3	33.8				
	VR3-10	3/8	10.0	10.5	15.0	13.3	33.8				
	VR3-12	1/2	12.0	13.0	19.2	16.0	38.6				
12-10 A.W.G. 4-6 mm ²	VR5-3.5	#6	3.5	3.7	7.2	5.9	22.5	13.0	3.4	6.5	1.0
	VR5-4S	#8	4.0	4.3	7.2	5.9	22.5				
	VR5-4	#8	4.0	4.3	9.5	8.3	26.0				
	VR5-5	#10	5.0	5.3	9.5	8.3	26.0				
	VR5-6	1/4	6.0	6.4	12.0	10.5	29.5				
	VR5-8	5/16	8.0	8.4	15.0	13.7	34.2				
	VR5-10	3/8	10.0	10.5	15.0	13.7	34.2				
	VR5-12	1/2	12.0	13.0	19.2	16.0	38.6				

VINYL-INSULATED RING TERMINALS (EASY-ENTRY)

PVC絕緣圓型端子 (易進式)

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: COPPER
 PLATING: TIN

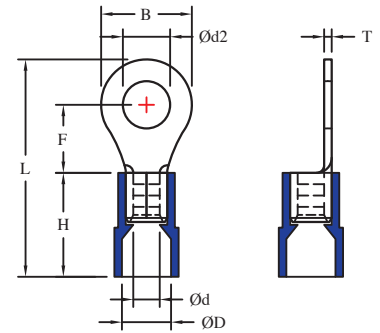


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	Ød2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	EVR1-3	#4	3.0	3.2	5.5	4.8	18.0	10.5	1.7	4.1	0.75
	EVR1-3.5S	#6	3.5	3.7	5.5	4.8	18.0				
	EVR1-3.5	#6	3.5	3.7	6.6	6.3	20.1				
	EVR1-4S	#8	4.0	4.3	6.6	6.3	20.1				
	EVR1-4	#8	4.0	4.3	8.0	7.0	21.5				
	EVR1-5	#10	5.0	5.3	8.0	7.0	21.5				
	EVR1-6	1/4	6.0	6.4	11.6	11.1	27.4				
	EVR1-8	5/16	8.0	8.4	11.6	11.1	27.4				
	EVR1-10	3/8	10.0	10.5	13.6	13.9	31.2				
16-14 A.W.G. 1.5-2.5 mm ²	EVR2-3	#4	3.0	3.2	6.6	4.3	18.6	11.0	2.3	4.5	0.8
	EVR2-3.5S	#6	3.5	3.7	6.6	4.3	18.6				
	EVR2-3.5	#6	3.5	3.7	6.6	6.3	20.6				
	EVR2-4S	#8	4.0	4.3	6.6	6.3	20.6				
	EVR2-4	#8	4.0	4.3	8.5	7.8	23.0				
	EVR2-5S	#10	5.0	5.3	8.5	7.8	23.0				
	EVR2-5	#10	5.0	5.3	9.5	7.3	23.0				
	EVR2-6	1/4	6.0	6.4	12.0	11.0	28.0				
	EVR2-8	5/16	8.0	8.4	12.0	11.0	28.0				
	EVR2-10	3/8	10.0	10.5	13.6	13.9	31.7				
12-10 A.W.G. 4-6 mm ²	EVR5-3.5	#6	3.5	3.7	7.2	5.9	22.5	13.0	3.4	6.5	1.0
	EVR5-4S	#8	4.0	4.3	7.2	5.9	22.5				
	EVR5-4	#8	4.0	4.3	9.5	8.3	26.0				
	EVR5-5	#10	5.0	5.3	9.5	8.3	26.0				
	EVR5-6	1/4	6.0	6.4	12.0	10.5	29.5				
	EVR5-8	5/16	8.0	8.4	15.0	13.7	34.2				
	EVR5-10	3/8	10.0	10.5	15.0	13.7	34.2				
	EVR5-12	1/2	12.0	13.0	19.2	16.0	38.6				

NYLON-INSULATED RING TERMINALS (EASY-ENTRY)

尼龍絕緣圓型端子 (易進式)


INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: COPPER
PLATING: TIN

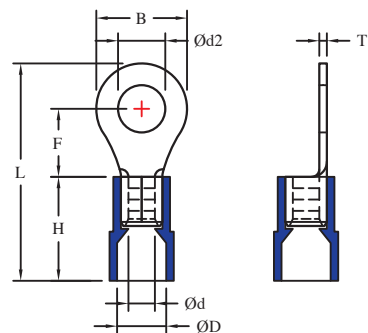

WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	Ød2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	ENR1-3	#4	3.0	3.2	5.5	4.8	18.5	11.0	1.7	4.1	0.75
	ENR1-3.5S	#6	3.5	3.7	5.5	4.8	18.5				
	ENR1-3.5	#6	3.5	3.7	6.6	6.3	20.6				
	ENR1-4S	#8	4.0	4.3	6.6	6.3	20.6				
	ENR1-4	#8	4.0	4.3	8.0	7.0	22.0				
	ENR1-5	#10	5.0	5.3	8.0	7.0	22.0				
	ENR1-6	1/4	6.0	6.4	11.6	11.1	27.9				
	ENR1-8	5/16	8.0	8.4	11.6	11.1	27.9				
	ENR1-10	3/8	10.0	10.5	13.6	13.9	31.7				
16-14 A.W.G. 1.5-2.5 mm ²	ENR2-3	#4	3.0	3.2	6.6	4.3	18.6	11.0	2.3	4.5	0.8
	ENR2-3.5S	#6	3.5	3.7	6.6	4.3	18.6				
	ENR2-3.5	#6	3.5	3.7	6.6	6.3	20.6				
	ENR2-4S	#8	4.0	4.3	6.6	6.3	20.6				
	ENR2-4	#8	4.0	4.3	8.5	7.8	23.0				
	ENR2-5S	#10	5.0	5.3	8.5	7.8	23.0				
	ENR2-5	#10	5.0	5.3	9.5	7.3	23.0				
	ENR2-6	1/4	6.0	6.4	12.0	11.0	28.0				
	ENR2-8	5/16	8.0	8.4	12.0	11.0	28.0				
	ENR2-10	3/8	10.0	10.5	13.6	13.9	31.7				
12-10 A.W.G. 4-6 mm ²	ENR5-3.5	#6	3.5	3.7	7.2	5.9	22.5	13.0	3.4	6.5	1.0
	ENR5-4S	#8	4.0	4.3	7.2	5.9	22.5				
	ENR5-4	#8	4.0	4.3	9.5	8.3	26.0				
	ENR5-5	#10	5.0	5.3	9.5	8.3	26.0				
	ENR5-6	1/4	6.0	6.4	12.0	10.5	29.5				
	ENR5-8	5/16	8.0	8.4	15.0	13.7	34.2				
	ENR5-10	3/8	10.0	10.5	15.0	13.7	34.2				
	ENR5-12	1/2	12.0	13.0	19.2	16.0	38.6				

VINYL-INSULATED RING TERMINALS (DOUBLE CRIMP)**PVC絕緣圓型端子 (易進式銅管)**

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: COPPER
 METALLIC SLEEVE: COPPER
 PLATING: TIN

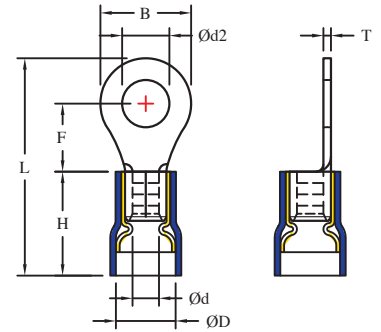


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	Ød2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	VR1-3C	#4	3.0	3.2	5.5	4.8	18.0	10.5	1.7	4.5	0.75
	VR1-3.5SC	#6	3.5	3.7	5.5	4.8	18.0				
	VR1-3.5C	#6	3.5	3.7	6.6	6.3	20.1				
	VR1-4SC	#8	4.0	4.3	6.6	6.3	20.1				
	VR1-4C	#8	4.0	4.3	8.0	7.0	21.5				
	VR1-5C	#10	5.0	5.3	8.0	7.0	21.5				
	VR1-6C	1/4	6.0	6.4	11.6	11.1	27.4				
	VR1-8C	5/16	8.0	8.4	11.6	11.1	27.4				
	VR1-10C	3/8	10.0	10.5	13.6	13.9	31.2				
16-14 A.W.G. 1.5-2.5 mm ²	VR2-3C	#4	3.0	3.2	6.6	4.3	18.1	10.5	2.3	5.0	0.8
	VR2-3.5SC	#6	3.5	3.7	6.6	4.3	18.1				
	VR2-3.5C	#6	3.5	3.7	6.6	6.3	20.1				
	VR2-4SC	#8	4.0	4.3	6.6	6.3	20.1				
	VR2-4C	#8	4.0	4.3	8.5	7.8	22.5				
	VR2-5SC	#10	5.0	5.3	8.5	7.8	22.5				
	VR2-5C	#10	5.0	5.3	9.5	7.3	22.5				
	VR2-6C	1/4	6.0	6.4	12.0	11.0	27.5				
	VR2-8C	5/16	8.0	8.4	12.0	11.0	27.5				
	VR2-10C	3/8	10.0	10.5	13.6	13.9	31.2				
12-10 A.W.G. 4-6 mm ²	VR5-3.5C	#6	3.5	3.7	7.2	5.9	22.5	13.0	3.4	6.7	1.0
	VR5-4SC	#8	4.0	4.3	7.2	5.9	22.5				
	VR5-4C	#8	4.0	4.3	9.5	8.3	26.0				
	VR5-5C	#10	5.0	5.3	9.5	8.3	26.0				
	VR5-6C	1/4	6.0	6.4	12.0	10.5	29.5				
	VR5-8C	5/16	8.0	8.4	15.0	13.7	34.2				
	VR5-10C	3/8	10.0	10.5	15.0	13.7	34.2				
	VR5-12C	1/2	12.0	13.0	19.2	16.0	38.6				

NYLON-INSULATED RING TERMINALS (DOUBLE CRIMP)

尼龍絕緣圓型端子 (易進式銅管)

INSULATION MATERIAL: NYLON
 TERMINAL MATERIAL: COPPER
 METALLIC SLEEVE: COPPER
 PLATING: TIN

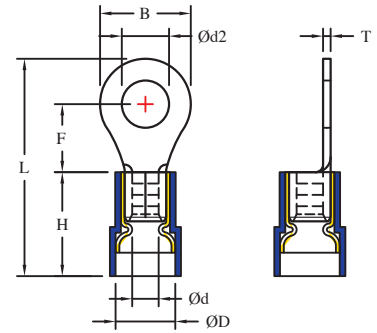


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)							
		American	Metric	Ød2	B	F	L	H	Ød	ØD	T
22-16 A.W.G. 0.5-1.5 mm ²	ENR1-3C	#4	3.0	3.2	5.5	4.8	18.5	11.0	1.7	4.5	0.75
	ENR1-3.5SC	#6	3.5	3.7	5.5	4.8	18.5				
	ENR1-3.5C	#6	3.5	3.7	6.6	6.3	20.6				
	ENR1-4SC	#8	4.0	4.3	6.6	6.3	20.6				
	ENR1-4C	#8	4.0	4.3	8.0	7.0	22.0				
	ENR1-5C	#10	5.0	5.3	8.0	7.0	22.0				
	ENR1-6C	1/4	6.0	6.4	11.6	11.1	27.9				
	ENR1-8C	5/16	8.0	8.4	11.6	11.1	27.9				
	ENR1-10C	3/8	10.0	10.5	13.6	13.9	31.7				
16-14 A.W.G. 1.5-2.5 mm ²	ENR2-3C	#4	3.0	3.2	6.6	4.3	18.6	11.0	2.3	5.0	0.8
	ENR2-3.5SC	#6	3.5	3.7	6.6	4.3	18.6				
	ENR2-3.5C	#6	3.5	3.7	6.6	6.3	20.6				
	ENR2-4SC	#8	4.0	4.3	6.6	6.3	20.6				
	ENR2-4C	#8	4.0	4.3	8.5	7.8	23.0				
	ENR2-5SC	#10	5.0	5.3	8.5	7.8	23.0				
	ENR2-5C	#10	5.0	5.3	9.5	7.3	23.0				
	ENR2-6C	1/4	6.0	6.4	12.0	11.0	28.0				
	ENR2-8C	5/16	8.0	8.4	12.0	11.0	28.0				
	ENR2-10C	3/8	10.0	10.5	13.6	13.9	31.7				
12-10 A.W.G. 4-6 mm ²	ENR5-3.5C	#6	3.5	3.7	7.2	5.9	22.5	13.0	3.4	6.7	1.0
	ENR5-4SC	#8	4.0	4.3	7.2	5.9	22.5				
	ENR5-4C	#8	4.0	4.3	9.5	8.3	26.0				
	ENR5-5C	#10	5.0	5.3	9.5	8.3	26.0				
	ENR5-6C	1/4	6.0	6.4	12.0	10.5	29.5				
	ENR5-8C	5/16	8.0	8.4	15.0	13.7	34.2				
	ENR5-10C	3/8	10.0	10.5	15.0	13.7	34.2				
	ENR5-12C	1/2	12.0	13.0	19.2	16.0	38.6				

INSULATED HEAT SHRINKABLE RING TERMINALS (BRAZED SEAM)

絕緣熱縮收圓型端子 (焊接)

INSULATION MATERIAL: HIGH DENSITY PE
 TERMINAL MATERIAL: COPPER
 PLATING: TIN

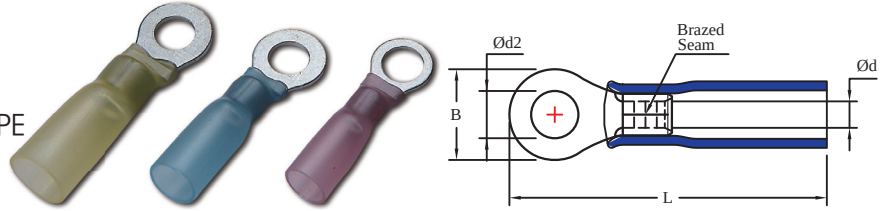


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size		Dimensions (mm)			
		American	Metric	Ød2	B	L	Ød
22-16 A.W.G. 0.5-1.5 mm ²	HR1-3.5SNB-K	#6	3.5	3.7	5.5	25.0	1.7
	HR1-4NB-K	#8	4.0	4.3	8.0	28.0	
	HR1-5NB-K	#10	5.0	5.3	8.0	28.0	
	HR1-6NB-K	1/4	6.0	6.4	11.6	34.0	
	HR1-8NB-K	5/16	8.0	8.4	11.6	34.0	
	HR1-10NB-K	3/8	10.0	10.5	13.6	38.0	
16-14 A.W.G. 1.5-2.5 mm ²	HR2-3.5SNB-K	#6	3.5	3.7	6.6	25.0	2.3
	HR2-4NB-K	#8	4.0	4.3	8.5	29.0	
	HR2-5NB-K	#10	5.0	5.3	9.5	29.0	
	HR2-6NB-K	1/4	6.0	6.4	12.0	34.0	
	HR2-8NB-K	5/16	8.0	8.4	12.0	34.0	
	HR2-10NB-K	3/8	10.0	10.5	13.6	38.0	
12-10 A.W.G. 4-6 mm ²	HR5-4NB-K	#8	4.0	4.3	9.5	33.0	3.4
	HR5-5NB-K	#10	5.0	5.3	9.5	33.0	
	HR5-6NB-K	1/4	6.0	6.4	12.0	37.0	
	HR5-8NB-K	5/16	8.0	8.4	15.0	41.0	
	HR5-10NB-K	3/8	10.0	10.5	15.0	41.0	
	HR5-12NB-K	1/2	12.0	13.0	19.2	46.0	

NON-INSULATED DIN 46234 RING TERMINALS (BRAZED SEAM)

無絶縁 DIN 46234 德規圓型端子 (焊接)

TERMINAL MATERIAL: COPPER
PLATING: TIN

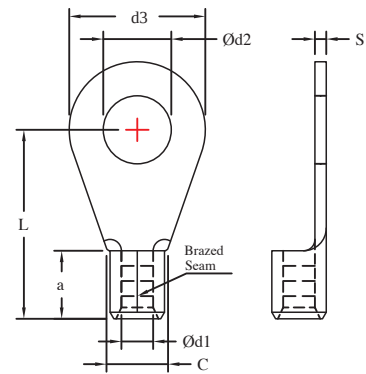


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size	Dimensions (mm)						
		Metric	a	c	Ød1	Ød2	d3	L	s
22-16 A.W.G. 0.5-1.5 mm ²	DR2.5-1NB	2.5	5.0	4.0	1.6	2.7	6.0	11.0	0.8
	DR3-1NB	3				3.2	6.0	11.0	
	DR3.5-1NB	3.5				3.7	6.0	11.0	
	DR4S-1NB	4				4.3	7.0	11.0	
	DR4-1NB	4				4.3	8.0	12.0	
	DR5S-1NB	5				5.3	8.0	12.0	
	DR5-1NB	5				5.3	10.0	13.0	
	DR6S-1NB	6				6.5	10.0	13.0	
	DR6-1NB	6				6.5	11.0	16.0	
	DR8-1NB	8				8.4	14.0	17.0	
16-14 A.W.G. 1.5-2.5 mm ²	DR3-2.5NB	3	5.0	4.5	2.3	3.2	6.0	11.0	0.8
	DR3.5-2.5NB	3.5				3.7	6.0	11.0	
	DR4S-2.5NB	4				4.3	6.8	11.0	
	DR4-2.5NB	4				4.3	8.0	12.0	
	DR5S-2.5NB	5				5.3	8.0	12.0	
	DR5-2.5NB	5				5.3	10.0	14.0	
	DR6S-2.5NB	6				6.5	10.0	14.0	
	DR6-2.5NB	6				6.5	11.0	16.0	
	DR8-2.5NB	8				8.4	14.0	17.0	
	DR10-2.5NB	10				10.5	18.0	20.0	
12-10 A.W.G. 4-6 mm ²	DR4-6NB	4	6.0	6.0	3.6	4.3	8.0	14.0	1.0
	DR5-6NB	5				5.3	10.0	15.0	
	DR6-6NB	6				6.5	11.0	16.0	
	DR8-6NB	8				8.4	14.0	19.0	
	DR10-6NB	10				10.5	18.0	21.0	
	DR12-6NB	12				13.0	18.0	21.0	
8 A.W.G. 10 mm ²	DR5-10NB	5	8.0	8.0	4.5	5.3	10.0	16.0	1.1
	DR6-10NB	6				6.5	11.0	17.0	
	DR8-10NB	8				8.4	14.0	20.0	
	DR10-10NB	10				10.5	18.0	21.0	
	DR12-10NB	12				13.0	22.0	23.0	

NON-INSULATED DIN 46234 RING TERMINALS (BRAZED SEAM)

無絶縁 DIN 46234 德規圓型端子 (焊接)



TERMINAL MATERIAL: COPPER
PLATING: TIN

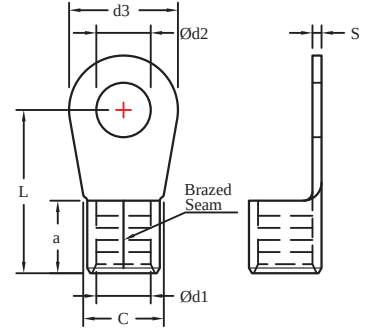

WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size	Dimensions (mm)						
		Metric	a	c	Ød1	Ød2	d3	L	s
6 A.W.G. 16 mm ²	DR5-16NB	5	10.0	10.5	5.8	5.3	11.0	20.0	1.2
	DR6-16NB	6				6.5	11.0	20.0	
	DR8-16NB	8				8.4	14.0	22.0	
	DR10-16NB	10				10.5	18.0	24.0	
	DR12-16NB	12				13.0	22.0	26.0	
4 A.W.G. 25 mm ²	DR5-25NB	5	11.0	12.0	7.5	5.3	12.0	25.0	1.5
	DR6-25NB	6				6.5	12.0	25.0	
	DR8-25NB	8				8.4	16.0	25.0	
	DR10-25NB	10				10.5	18.0	26.0	
	DR12-25NB	12				13.0	22.0	31.0	
	DR16-25NB	16				17.0	28.0	35.0	
2 A.W.G. 35 mm ²	DR6-35NB	6	12.0	15.0	9.0	6.5	15.0	26.0	1.6
	DR8-35NB	8				8.4	16.0	26.0	
	DR10-35NB	10				10.5	18.0	27.0	
	DR12-35NB	12				13.0	22.0	31.0	
	DR16-35NB	16				17.0	28.0	36.0	
1/0 A.W.G. 50 mm ²	DR6-50NB	6	16.0	17.0	11.0	6.5	18.0	34.0	1.8
	DR8-50NB	8				8.0	18.0	34.0	
	DR10-50NB	10				10.5	18.0	34.0	
	DR12-50NB	12				13.0	22.0	36.0	
	DR16-50NB	16				17.0	28.0	40.0	
2/0 A.W.G. 70 mm ²	DR6-70NB	6	18.0	21.0	13.0	6.5	22.0	38.0	2.0
	DR8-70NB	8				8.4	22.0	38.0	
	DR10-70NB	10				10.5	22.0	38.0	
	DR12-70NB	12				13.0	22.0	38.0	
	DR16-70NB	16				17.0	28.0	42.0	
3/0 A.W.G. 95 mm ²	DR8-95NB	8	20.0	23.0	15.0	8.4	24.0	42.0	2.5
	DR10-95NB	10				10.5	24.0	42.0	
	DR12-95NB	12				13.0	24.0	42.0	
	DR16-95NB	16				17.0	28.0	44.0	
4/0 A.W.G. 120 mm ²	DR8-120NB	8	22.0	24.0	16.5	8.4	24.0	44.0	3.0
	DR10-120NB	10				10.5	24.0	44.0	
	DR12-120NB	12				13.0	24.0	44.0	
	DR16-120NB	16				17.0	28.0	48.0	

NON-INSULATED DIN 46234 RING TERMINALS (BRAZED SEAM)
無絶縁 DIN 46234 德規圓型端子 (焊接)

TERMINAL MATERIAL: COPPER
PLATING: TIN

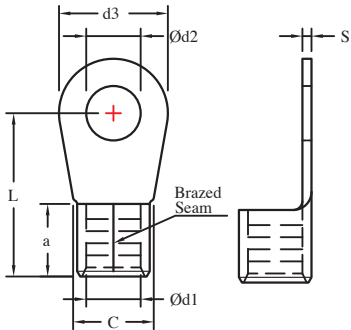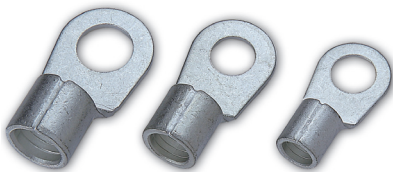


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size	Dimensions (mm)						
		Metric	a	c	Ød1	Ød2	d3	L	s
250/300 A.W.G. 150 mm ²	DR10-150NB	10	24.0	28.0	19.0	10.5	30.0	50.0	3.2
	DR12-150NB	12				13.0	30.0	50.0	
	DR16-150NB	16				17.0	30.0	50.0	
300/350 A.W.G. 185 mm ²	DR10-185NB	10	28.0	33.0	21.0	10.5	36.0	50.0	3.5
	DR12-185NB	12				13.0			
	DR16-185NB	16				17.0			
400 A.W.G. 240 mm ²	DR10-240NB	10	32.0	36.0	23.5	10.5	38.0	56.0	4.0
	DR12-240NB	12				13.0			
	DR16-240NB	16				17.0			

VINYL-INSULATED DIN 46237 RING TERMINALS

PVC絶縁 DIN 46237 徳規圓型端子

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: COPPER
 PLATING: TIN

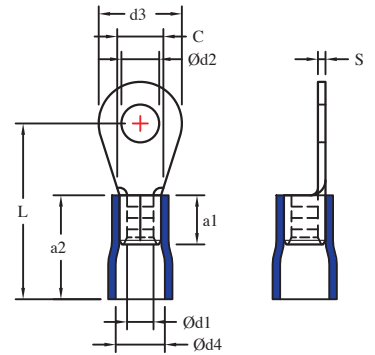


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size	Dimensions (mm)								
		Metric	Ød1	a1	a2	c	Ød2	d3	Ød4	L	s
22-16 A.W.G. 0.5-1.5 mm ²	VDR2.5-1	2.5	1.6	5.0	10.0	4.0	2.7	6.0	4.2	16.0	0.8
	VDR3-1	3					3.2	6.0		16.0	
	VDR3.5-1	3.5					3.7	6.0		16.0	
	VDR4S-1	4					4.3	7.0		16.0	
	VDR4-1	4					4.3	8.0		17.0	
	VDR5S-1	5					5.3	8.0		17.0	
	VDR5-1	5					5.3	10.0		18.0	
	VDR6S-1	6					6.5	10.0		18.0	
	VDR6-1	6					6.5	11.0		21.0	
	VDR8-1	8					8.4	14.0		22.0	
16-14 A.W.G. 1.5-2.5 mm ²	VDR3-2.5	3	2.3	5.0	10.0	4.5	3.2	6.0	4.6	16.0	0.8
	VDR3.5-2.5	3.5					3.7	6.0		16.0	
	VDR4S-2.5	4					4.3	6.8		16.0	
	VDR4-2.5	4					4.3	8.0		17.0	
	VDR5S-2.5	5					5.3	8.0		17.0	
	VDR5-2.5	5					5.3	10.0		19.0	
	VDR6S-2.5	6					6.5	10.0		19.0	
	VDR6-2.5	6					6.5	11.0		21.0	
	VDR8-2.5	8					8.4	14.0		22.0	
	VDR10-2.5	10					10.5	18.0		25.0	
12-10 A.W.G. 4-6 mm ²	VDR4-6	4	3.6	6.0	13.0	6.0	4.3	8.0	6.6	21.0	1.0
	VDR5-6	5					5.3	10.0		22.0	
	VDR6-6	6					6.5	11.0		23.0	
	VDR8-6	8					8.4	14.0		26.0	
	VDR10-6	10					10.5	18.0		28.0	
	VDR12-6	12					13.0	18.0		28.0	

NYLON-INSULATED DIN 46237 RING TERMINALS (EASY-ENTRY)

尼龍絕緣 DIN 46237 德規圓型端子 (易進式)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: COPPER
PLATING: TIN

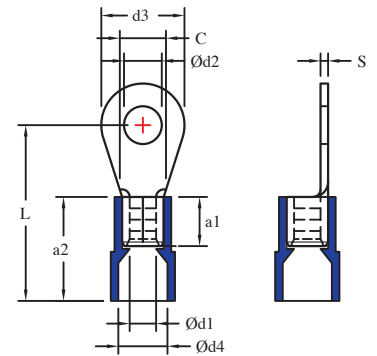


WIRE RANGE A.W.G. mm²		ITEM NO.	Stud Size	Dimensions (mm)								
			Metric	Ød1	a1	a2	c	Ød2	d3	Ød4	L	s
22-16 A.W.G. 0.5-1.5 mm²		ENDR2.5-1	2.5	1.6	5.0	11.0	4.0	2.7	6.0	4.1	17.0	0.8
		ENDR3-1	3					3.2	6.0		17.0	
		ENDR3.5-1	3.5					3.7	6.0		17.0	
		ENDR4S-1	4					4.3	7.0		17.0	
		ENDR4-1	4					4.3	8.0		18.0	
		ENDR5S-1	5					5.3	8.0		18.0	
		ENDR5-1	5					5.3	10.0		19.0	
		ENDR6S-1	6					6.5	10.0		19.0	
		ENDR6-1	6					6.5	11.0		22.0	
		ENDR8-1	8					8.4	14.0		23.0	
16-14 A.W.G. 1.5-2.5 mm²		ENDR3-2.5	3	2.3	5.0	11.0	4.5	3.2	6.0	4.5	17.0	0.8
		ENDR3.5-2.5	3.5					3.7	6.0		17.0	
		ENDR4S-2.5	4					4.3	6.8		17.0	
		ENDR4-2.5	4					4.3	8.0		18.0	
		ENDR5S-2.5	5					5.3	8.0		18.0	
		ENDR5-2.5	5					5.3	10.0		20.0	
		ENDR6S-2.5	6					6.5	10.0		20.0	
		ENDR6-2.5	6					6.5	11.0		22.0	
		ENDR8-2.5	8					8.4	14.0		23.0	
		ENDR10-2.5	10					10.5	18.0		26.0	
12-10 A.W.G. 4-6 mm²		ENDR4-6	4	3.6	6.0	13.0	6.0	4.3	8.0	6.5	21.0	1.0
		ENDR5-6	5					5.3	10.0		22.0	
		ENDR6-6	6					6.5	11.0		23.0	
		ENDR8-6	8					8.4	14.0		26.0	
		ENDR10-6	10					10.5	18.0		28.0	
		ENDR12-6	12					13.0	18.0		28.0	

VINYL-INSULATED DIN STANDARD RING TERMINALS (DOUBLE CRIMP)

PVC絕緣德規圓型端子 (易進式銅管)

INSULATION MATERIAL: VINYL(PVC)
 TERMINAL MATERIAL: COPPER
 PLATING: TIN

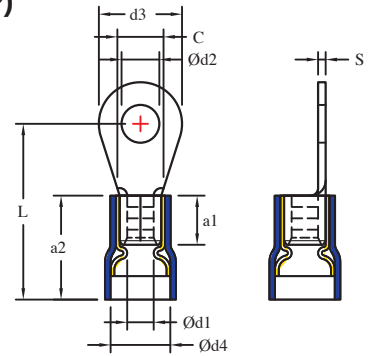


WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size	Dimensions (mm)								
		Metric	Ød1	a1	a2	c	Ød2	d3	Ød4	L	s
22-16 A.W.G. 0.5-1.5 mm ²	VDR2.5-1C	2.5	1.6	5.0	10.5	4.0	2.7	6.0	4.5	16.5	0.8
	VDR3-1C	3					3.2	6.0		16.5	
	VDR3.5-1C	3.5					3.7	6.0		16.5	
	VDR4S-1C	4					4.3	7.0		16.5	
	VDR4-1C	4					4.3	8.0		17.5	
	VDR5S-1C	5					5.3	8.0		17.5	
	VDR5-1C	5					5.3	10.0		18.5	
	VDR6S-1C	6					6.5	10.0		18.5	
	VDR6-1C	6					6.5	11.0		21.5	
	VDR8-1C	8					8.4	14.0		22.5	
16-14 A.W.G. 1.5-2.5 mm ²	VDR3-2.5C	3	2.3	5.0	10.5	4.5	3.2	6.0	5.0	16.5	0.8
	VDR3.5-2.5C	3.5					3.7	6.0		16.5	
	VDR4S-2.5C	4					4.3	6.8		16.5	
	VDR4-2.5C	4					4.3	8.0		17.5	
	VDR5S-2.5C	5					5.3	8.0		17.5	
	VDR5-2.5C	5					5.3	10.0		19.5	
	VDR6S-2.5C	6					6.5	10.0		19.5	
	VDR6-2.5C	6					6.5	11.0		21.5	
	VDR8-2.5C	8					8.4	14.0		22.5	
	VDR10-2.5C	10					10.5	18.0		25.5	
12-10 A.W.G. 4-6 mm ²	VDR4-6C	4	3.6	6.0	13.0	6.0	4.3	8.0	6.7	21.0	1.0
	VDR5-6C	5					5.3	10.0		22.0	
	VDR6-6C	6					6.5	11.0		23.0	
	VDR8-6C	8					8.4	14.0		26.0	
	VDR10-6C	10					10.5	18.0		28.0	
	VDR12-6C	12					13.0	18.0		28.0	

NYLON-INSULATED DIN STANDARD RING TERMINALS (DOUBLE CRIMP)

尼龍絕緣德規圓型端子 (易進式銅管)

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: COPPER
PLATING: TIN

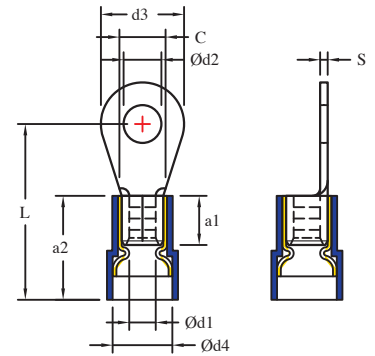

WIRE RANGE A.W.G. mm ²	ITEM NO.	Stud Size	Dimensions (mm)								
		Metric	Ød1	a1	a2	c	Ød2	d3	Ød4	L	s
22-16 A.W.G. 0.5-1.5 mm ²	ENDR2.5-1C	2.5	1.6	5.0	11.0	4.0	2.7	6.0	4.5	17.0	0.8
	ENDR3-1C	3					3.2	6.0		17.0	
	ENDR3.5-1C	3.5					3.7	6.0		17.0	
	ENDR4S-1C	4					4.3	7.0		17.0	
	ENDR4-1C	4					4.3	8.0		18.0	
	ENDR5S-1C	5					5.3	8.0		18.0	
	ENDR5-1C	5					5.3	10.0		19.0	
	ENDR6S-1C	6					6.5	10.0		19.0	
	ENDR6-1C	6					6.5	11.0		22.0	
	ENDR8-1C	8					8.4	14.0		23.0	
16-14 A.W.G. 1.5-2.5 mm ²	ENDR3-2.5C	3	2.3	5.0	11.0	4.5	3.2	6.0	5.0	17.0	0.8
	ENDR3.5-2.5C	3.5					3.7	6.0		17.0	
	ENDR4S-2.5C	4					4.3	6.8		17.0	
	ENDR4-2.5C	4					4.3	8.0		18.0	
	ENDR5S-2.5C	5					5.3	8.0		18.0	
	ENDR5-2.5C	5					5.3	10.0		20.0	
	ENDR6S-2.5C	6					6.5	10.0		20.0	
	ENDR6-2.5C	6					6.5	11.0		22.0	
	ENDR8-2.5C	8					8.4	14.0		23.0	
	ENDR10-2.5C	10					10.5	18.0		26.0	
12-10 A.W.G. 4-6 mm ²	ENDR4-6C	4	3.6	6.0	13.0	6.0	4.3	8.0	6.7	21.0	1.0
	ENDR5-6C	5					5.3	10.0		22.0	
	ENDR6-6C	6					6.5	11.0		23.0	
	ENDR8-6C	8					8.4	14.0		26.0	
	ENDR10-6C	10					10.5	18.0		28.0	
	ENDR12-6C	12					13.0	18.0		28.0	